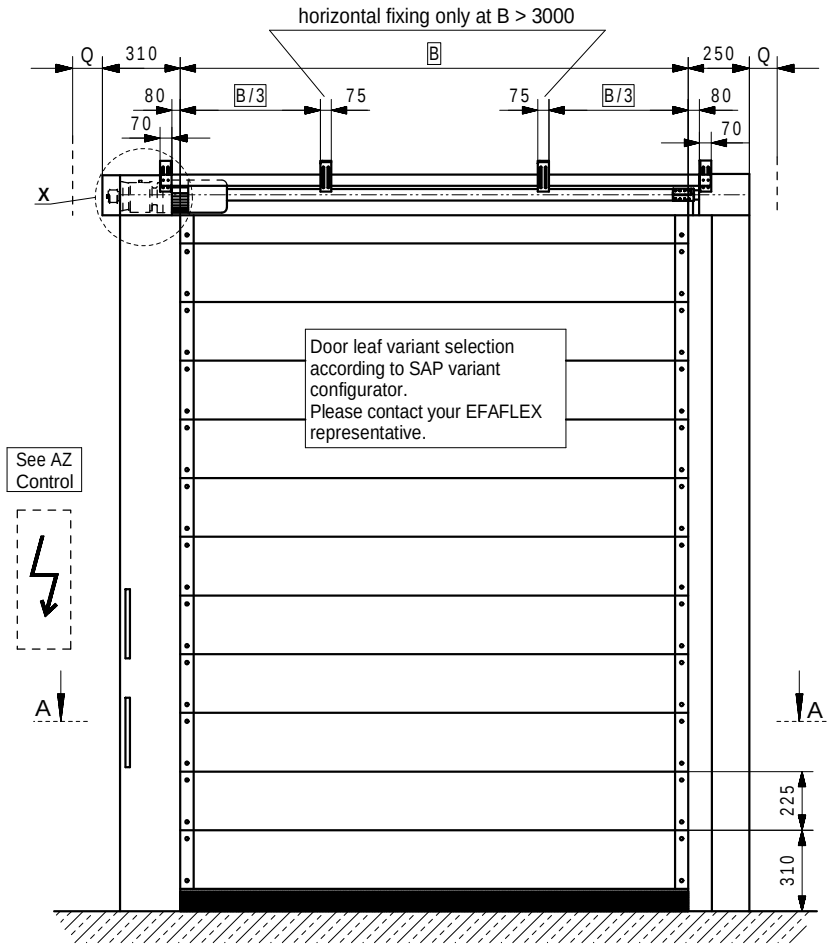

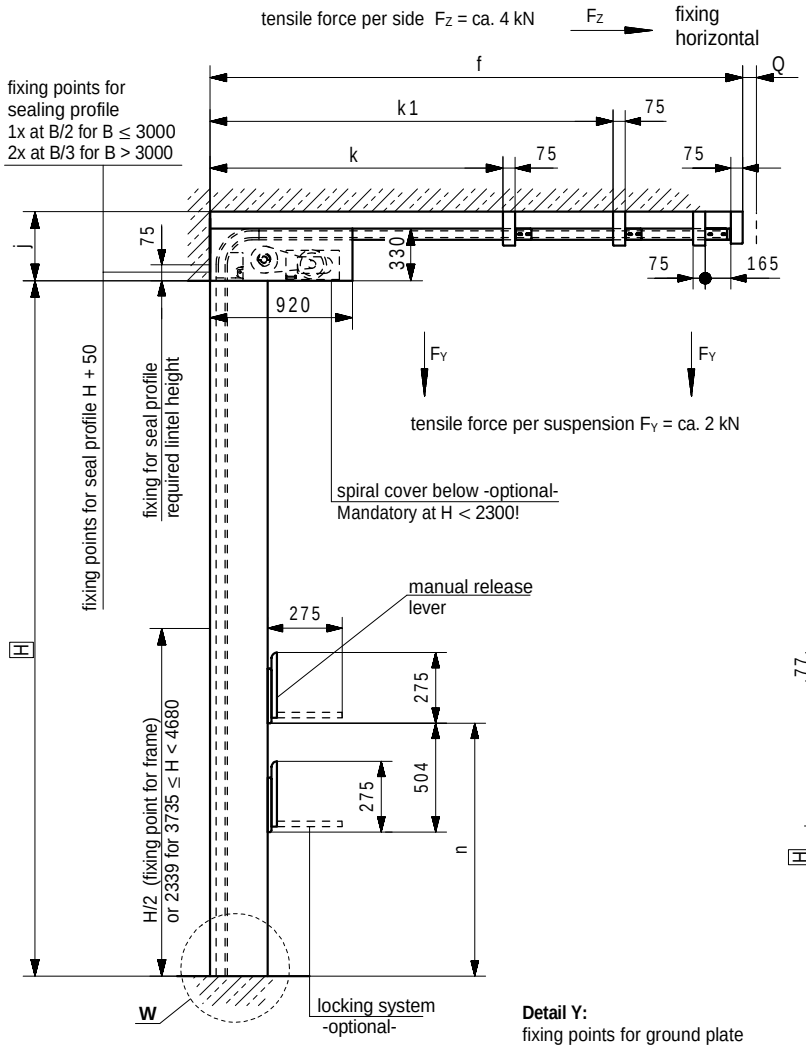

Dim.	mm	Remarks
f	H + 415	Max. length (at H > 2300)
	H + 915	Max. length (at H ≤ 2300)
j	355	minimum lintel height
	820	maximum lintel height
k	1885	only at H > 2500
k1	3485	only at H > 4100
n	H - 445	H < 2000
	1455	H ≥ 2000
Q	ca. 80	installation clearance
B		clear width
H		clear height

Unless otherwise stated, all dimensions are in mm.

Detail X:
fixing points for frame
at least 2 points
fixing hole 15 x 30

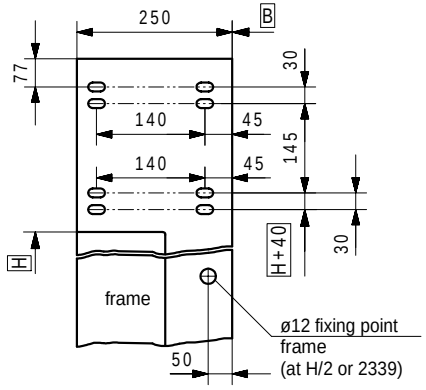

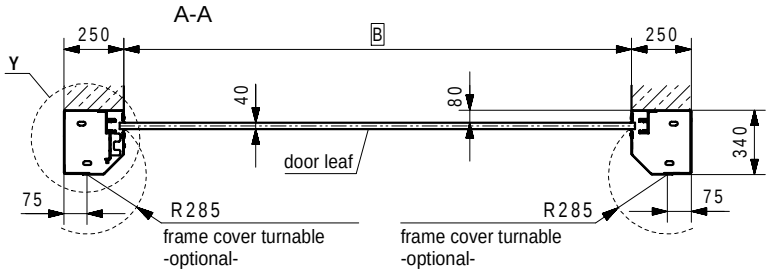

Detail W:
water drain recommendation
floor level according to DIN EN 12489



Detail Y:
fixing points for ground plate
3 points fixing hole 15 x 30



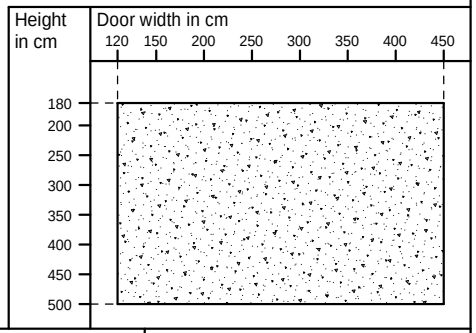

Weitergabe, Vervielfältigung sowie Verwertung des Inhaltes dieser Zeichnung sind verboten, soweit nichts ausdrücklich vereinbart. Diese Zeichnung ist urheberrechtlich geschützt.
ISO 16016

The reproduction, distribution and utilization of this drawing as well as the communication of its contents to third parties without explicit authorisation is prohibited.
This drawing is protected by copyright.
ISO 16016

Le dessin reste notre propriété.
Il n'est pas permis de le multiplier sans notre consentement, ni de soumettre aux autres personnes ni d'abandonner a la concurrence pour quelques intentions. Ce dessin est protégé par le droit d`auteur.
ISO 16016

	Date	Name
Drawn	19.03.2021	Urbas
Appr.		

EFAFLEX
schnelle und sichere Tore
EFAFLEX Tor- und Sicherheitssysteme GmbH & Co.KG
Fliederstraße 14
D-84079 Bruckberg

HIGH-SPEED SPIRAL DOOR
ECO - "L" - version

low lintel

Type: EFA-SST®-L N ECO

Drawing No.: 263 N07

Repl. for: 263 N06