



Dim.	mm	Remarks
f	H + 345	max. length (at H > 2300)
	H + 845	max. length (at H ≤ 2300)
j	345	minimum lintel height
k	845	maximum lintel height
k1	1855	only at H > 2500
n	H - 434	H < 2000
	1480	H ≥ 2000
n1	951	H < 2000
	1015	H ≥ 2000
Q	ca. 80	installation clearance
B		clear width
H		clear height



Unless otherwise stated, all dimensions are in mm.

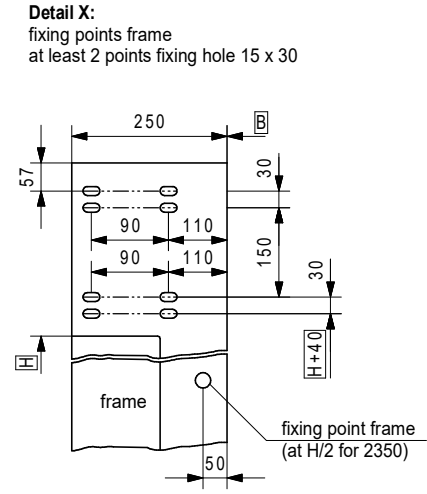

Detail W:
water drain recommendation
floor level according to DIN EN 12489



Detail Y:
fixing points ground plate
3 points fixing hole 15 x 30

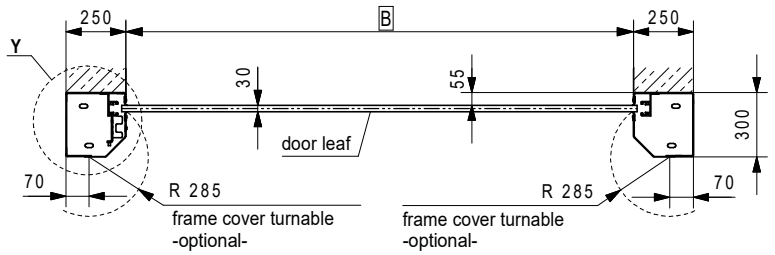

Height in cm	Door width in cm							
	120	150	200	250	300	350	400	
180								
200								
250								
300								
350								
400								
450								
500								

Weitergabe, Vervielfältigung sowie Verwertung des Inhaltes dieser Zeichnung sind verboten, soweit nichts ausdrücklich vereinbart. Diese Zeichnung ist urheberrechtlich geschützt. ISO 16016

The reproduction, distribution and utilization of this drawing as well as the communication of its contents to third parties without explicit authorisation is prohibited. This drawing is protected by copyright. ISO 16016

Le dessin reste notre propriété. Il n'est pas permis de le multiplier sans notre consentement, ni de soumettre aux autres personnes ni d'abandonner à la concurrence pour quelques intentions. Ce dessin est protégé par le droit d'auteur. ISO 16016

	Date	Name
Drawn	10.11.2025	Urbas
Appr.		

EFAFLEX
schnelle und sichere Tore

EFAFLEX Tor- und Sicherheitssysteme GmbH & Co.KG
Fliederstraße 14
D-84079 Bruckberg

HIGH-SPEED TURBO DOOR
"L" - version
low lintel

Type:	EFA-STT®-L N
Drawing No.:	272 N03
Repl. for:	272 N02