

DATA SHEET

Main properties



Resistance to wind load

Class 4 – 5



Thermal insulation

Up to 1.04 W/(m²K)



Acoustic-rated

Up to 26 dB



Resistance to water penetration

Class 1



Air permeability


Class 2

The values depend on the configuration of the door.

HS 5015 PU H 42

High-speed sectional door with steel sandwich section

With the adjustable track application H, the door can be fitted behind or above supply lines, for example. Door travel is supported by low-wear counter weights.

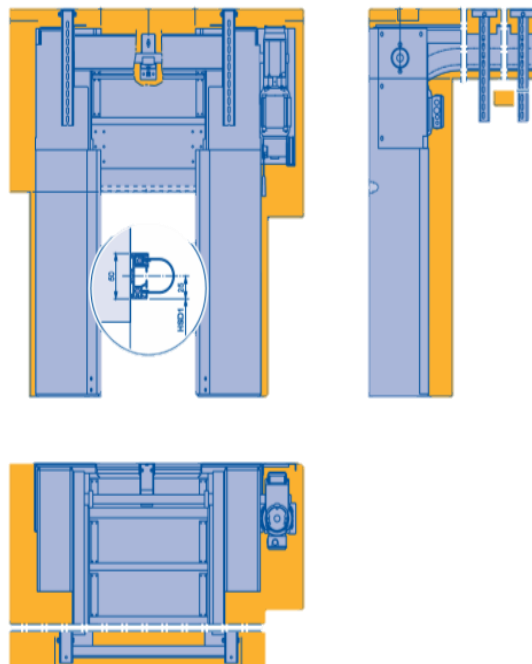

Gate size

Max. width	5000	mm
Max. height	6500	mm

Speed (FU control, 3-phase, AK 500 FUE-1)

Max. opening speed	1.5 – 2.5	(m/s)
Closing approx.	0,5	(m/s)

Product description	
Use	External / internal door
Design	Non-self-supporting
Door leaf	Steel sandwich sections with thermal break, PU-foamed
Depth	42 mm
Section height	250 mm
Ventilation grilles	Ventilation cross-section 54%
Potential-free contacts	3
Door leaf counterbalance	Belt mechanism and counter weights
Track application	Track application H (high-lift)

Door leaf		
Exterior surface finish	Micrograin	●
Interior surface finish	Stucco	●
Standard colour	RAL 9006	●
Optional colour	Wet coated, RAL to choose	○
Aluminium rail windows	Anodised aluminium E6 / EV1	○
Glazing	Double synthetic panes	○
ThermoFrame		○

● Standard ○ Optional

Performance characteristics		Achievable values	
Resistance to wind load acc. to EN 12424	Door width ≤ 5000 mm	Class	5
	Door width > 5000 mm ≤ 6000 mm		4
Thermal insulation acc. to EN 13241-1, ISO 12567-1 Door size 4000 × 4000 mm, without glazing, with ThermoFrame		W/(m²K)	1,04
Acoustic insulation acc. to EN 717-1		R [db]	26
Resistance to water penetration acc. to EN 12425		Class	1
Air permeability acc. to EN 12426		Class	2

The performance characteristics specified can only be achieved with the corresponding equipment.

Safety and operator equipment		
Emergency opening	Emergency hand chain	●
	UPS in plastic cabinet (200 × 400 × 200) for FU control 230 V, 1-phase (up to 9 m ² on request)	○
Security features	EN 13241.1	●
Operator and control	Frequency converter	●
	Connecting voltage, 1-phase, 1 – 230 V, N, PE	○
	Connecting voltage, 3-phase, 3 – 400 V, N, PE	●
	Open-Stop-Close button	●
	Main switch with all-pole switch-off, 1-phase	○
	Main switch with all-pole switch-off, 3-phase	●
	Emergency-off button, 1-phase	○
	Emergency-off button, 3-phase	●
	Electronic limit switch DES	●
	Closing zone monitoring, safety grille IP 67	●
Protection category for operator / control	IP 54 / IP 65	●
Fuse, 1-phase, 3-phase	16 A, slow-acting	●
Hold-open phase, in sec.	1 – 200	●
Control wiring	Plug-in	●

● Standard ○ Optional

The information above, in particular the specifications and illustrations, are not binding and do not constitute an agreement on quality or a guarantee. Changes and errors are expressly reserved. The data sheet is subject to copyright. No part may be reproduced without our prior permission.