


DATA SHEET

V 5015 SEL Flexible high-speed door

This door is suitable for indoor areas without draughts. The SoftEdge bottom profile and light grille are part of this model as standard. The aluminium wind lock also makes the door particularly service-friendly, as individual curtain segments can be quickly replaced if repairs are necessary.

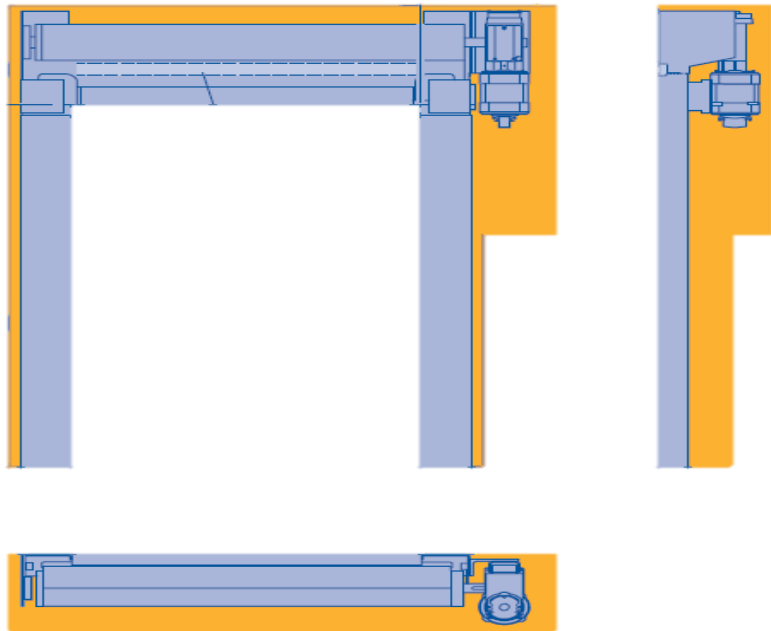

Gate size

Max. width	5000	mm
Max. height	5000	mm

Speed (FU control, 1-phase, BK 150 FUE-1)

Max. opening speed	1,5	(m/s)
Max. closing speed	0,8	(m/s)

Product description	
Use	Internal door
Curtain material	PVC
Fabric thickness (mm)	1,5
Vision panel thickness (mm)	2,0
Design	Self-supporting
Guide material / surface	Galvanized steel
	Optionally galvanized steel, coated (RAL to choose), polished stainless steel V2A
Shaft / operator cover	Optionally straight, chamfered 30°
Potential-free contacts	3
Temperature range	+5°C to +40°C

Equipment features		
Wind lock	Aluminium profiles	•
Bottom profile	SoftEdge (rubber bottom profile)	•
	RAL 1018 Zinc yellow	•
Curtain colours	RAL 2004 Pure orange	•
	RAL 3002 Carmine red	•
	RAL 5010 Gentian blue	•
	RAL 7038 Agate grey	•

• Standard ○ Optional

Safety and operator equipment		
Emergency opening	Emergency crank handle	•
	Emergency hand chain	○
	UPS in a plastic cabinet	○
Security features	EN 13241.1	•
Operator and control	Frequency converter	•
	Connecting voltage, 1-phase, 1 – 230 V, N, PE	•
	Open-Stop-Close button	•
	Main switch with all-pole switch-off, 1-phase	○
	Emergency-off button, 1-phase	○
	Electronic limit switch DES	•
	Closing zone monitoring, safety grille IP 67	•
Protection category for operator / control	IP 54 / IP 65	•
Fuse, 1-phase, 3-phase	16 A, slow-acting	•
Hold-open phase, in sec.	1 – 200	•
Control wiring	Plug-in	•

• Standard ○ Optional

The information above, in particular the specifications and illustrations, are not binding and do not constitute an agreement on quality or a guarantee. Changes and errors are expressly reserved. The data sheet is subject to copyright. No part may be reproduced without our prior permission.