TDOKU 9006876 / 03.2016

EN

Instructions for Fitting, Operating and Maintenance

Side door with frame made of aluminium profiles

A

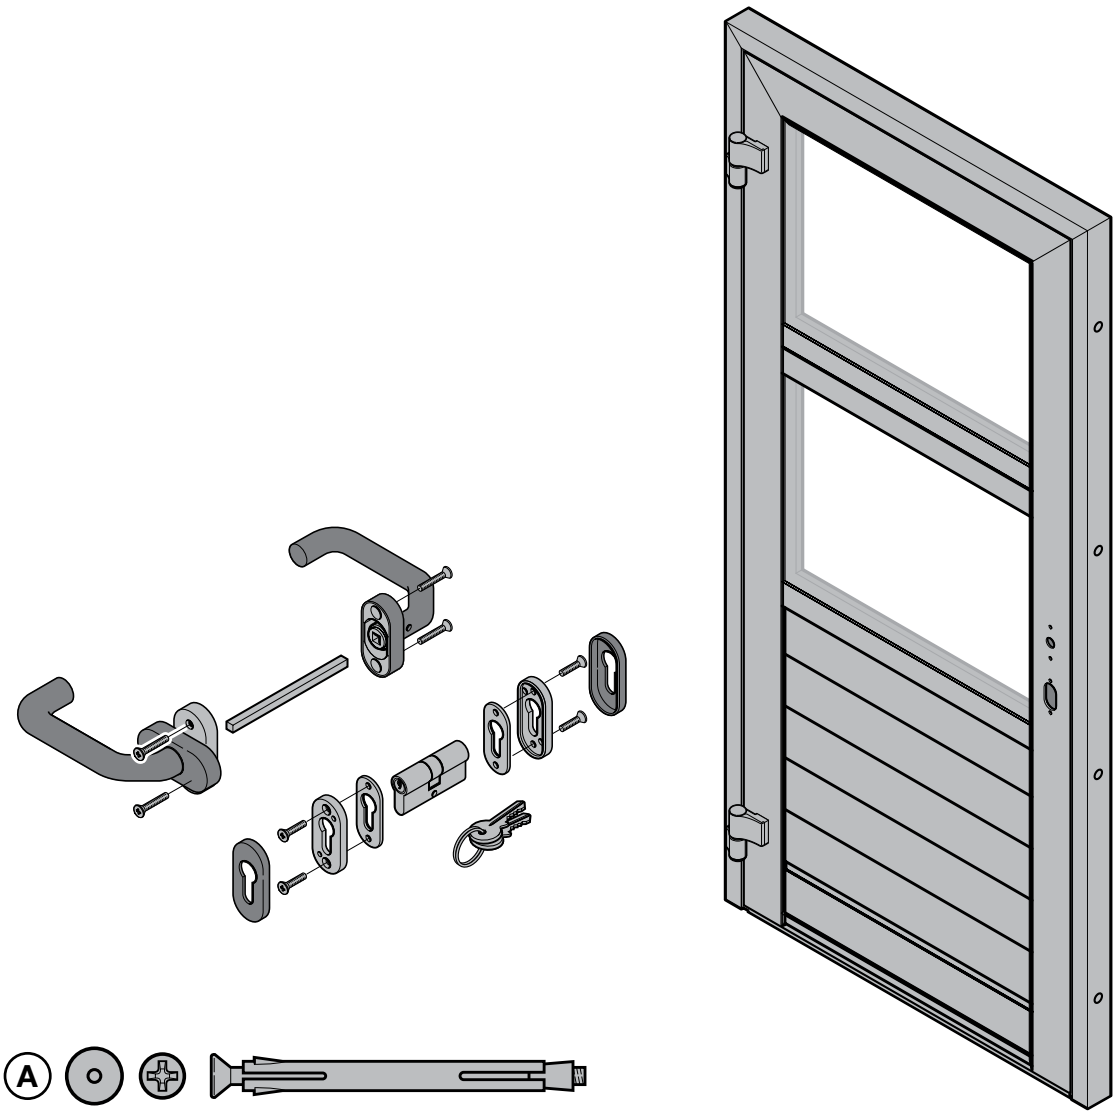

B

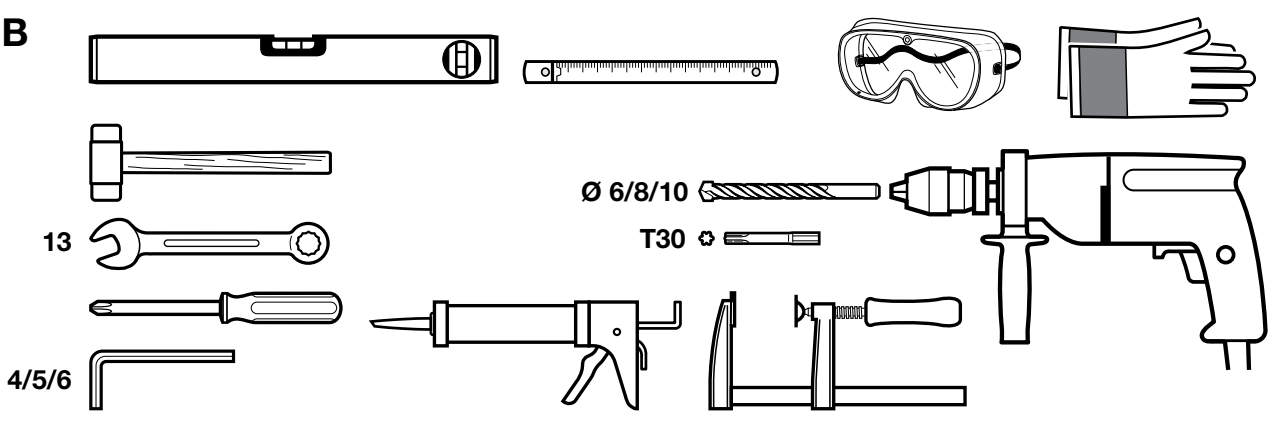

CONTENTS

A Items supplied....2
B Tools needed for assembly....2

1 About These Instructions....3
1.1 Warnings used....3
1.2 Symbols used....3
1.3 Abbreviations used....4
2 Basic Safety Instructions....4
2.1 Liability....4
3 Fitting....4
4 Inspection and Maintenance....4
4.1 Profile cylinder....4
4.2 Hinges....4
5 Cleaning and Care....4
5.1 Surface....4
5.2 Lock....4

....5

Dissemination as well as duplication of this document and the use and communication of its content are prohibited unless explicitly permitted. Noncompliance will result in damage compensation obligations. All rights reserved in the event of patent, utility model or design model registration. Subject to changes.

1 About These Instructions

Dear customer,

We are glad that you have decided on a quality product by our company.

These instructions are **original instructions** as outlined in the EC Directive 2006/42/EC. Read and follow these instructions carefully. They contain important information on the assembly, the operation and about the correct care/ maintenance of the side door, so that you can enjoy this product for many years.

Please pay particular attention to all safety and warning notices.

Be sure to keep this manual in a safe place!

1.1 Warnings used

ATTENTION
Indicates a danger that can lead to **damage** or **destruction** of the product.

1.2 Symbols used

Important note for avoiding damage to property

Permissible arrangement or activity

Non-permissible arrangement or activity

Optional components


Door open

Door closed

Maintenance-free

Dispose of component/packaging

1.3 Abbreviations used

OFF Top edge of finished floor line

2 Basic Safety Instructions

- ▶ Attach all the fastenings listed in the fitting instructions.
- ▶ Protect your door until construction is completed by covering it with foil and tape to avoid damages. However, keep in mind that tape can leave residue or may damage the coating, especially under prolonged exposure to the sun.
- ▶ Protect the door from aggressive and caustic substances.

2.1 Liability

Failure to observe these notes and the following information releases the manufacturer from his liability.

3 Fitting

For simple and professional fitting, carefully carry out the steps described in the illustrated section.

In the threshold area, you have the following options:

Threshold rail with floor recess:

The bottom spacer profile later disappears in the screed.

Threshold rail without floor recess:

- ▶ Unscrew the bottom spacer profile and fasten the threshold rail profile on site.

4 Inspection and Maintenance

4.1 Profile cylinder

ATTENTION
Oil on the profile cylinder The locking function of the profile cylinder can be compromised by the use of oil. ▶ Never use oil for the profile cylinder.

4.2 Hinges

The door hinges are maintenance-free.

ATTENTION
Greasing of the hinges If door hinges are greased, the bearings will wear out. ▶ Never grease the door hinges.

5 Cleaning and Care

5.1 Surface

Clear water is sufficient for cleaning and care. Use warm water together with a neutral, non-abrasive cleaning agent (household detergent, pH value 7) if more heavily soiled.

- ▶ Clean the surface **at least every 3 months** to maintain the surface properties.

ATTENTION
Damage from waterless cleaning Waterless cleaning damages the surface. ▶ Never clean the surfaces without water. ▶ Only use soft textile cloths or chamois. ▶ Rinse off any dirt and dust particles with clear water before rubbing off.

5.2 Lock

Perform upkeep on the lock and the lock cylinder 1 to 2 times per year, so that the door can be easily and quietly closed:

- ▶ Grease the rear side of the lock latch with Vaseline.
- ▶ Spray a special profile cylinder care product into the lock channel (available in specialised shops).

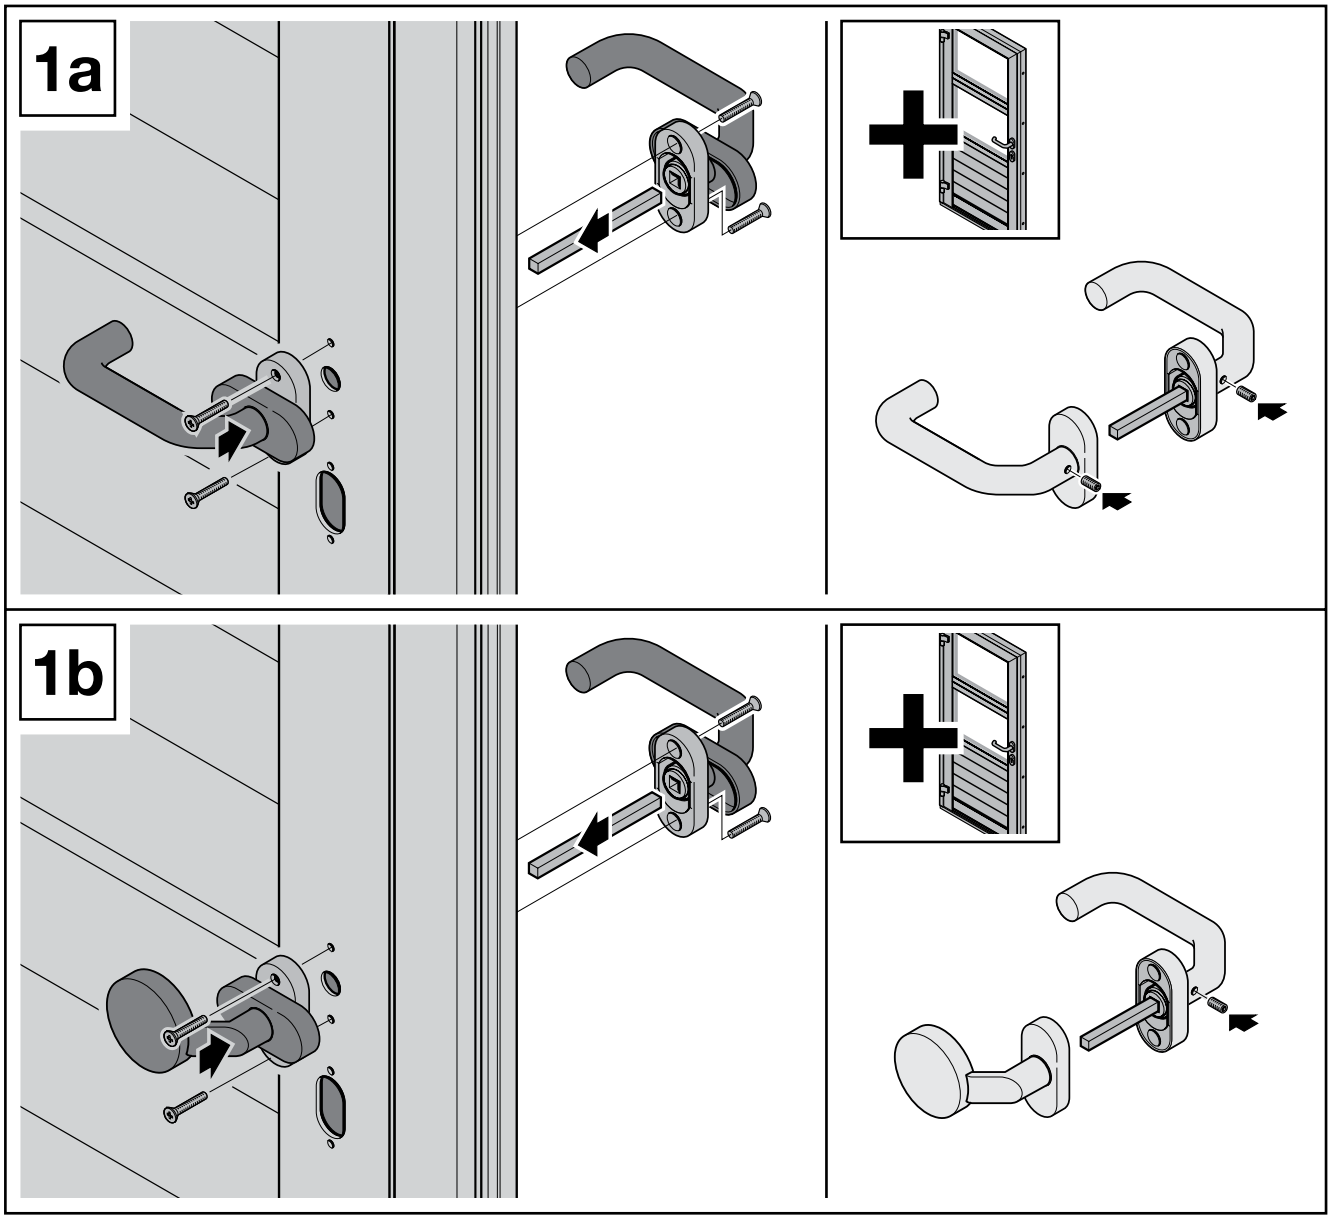
1a
1b

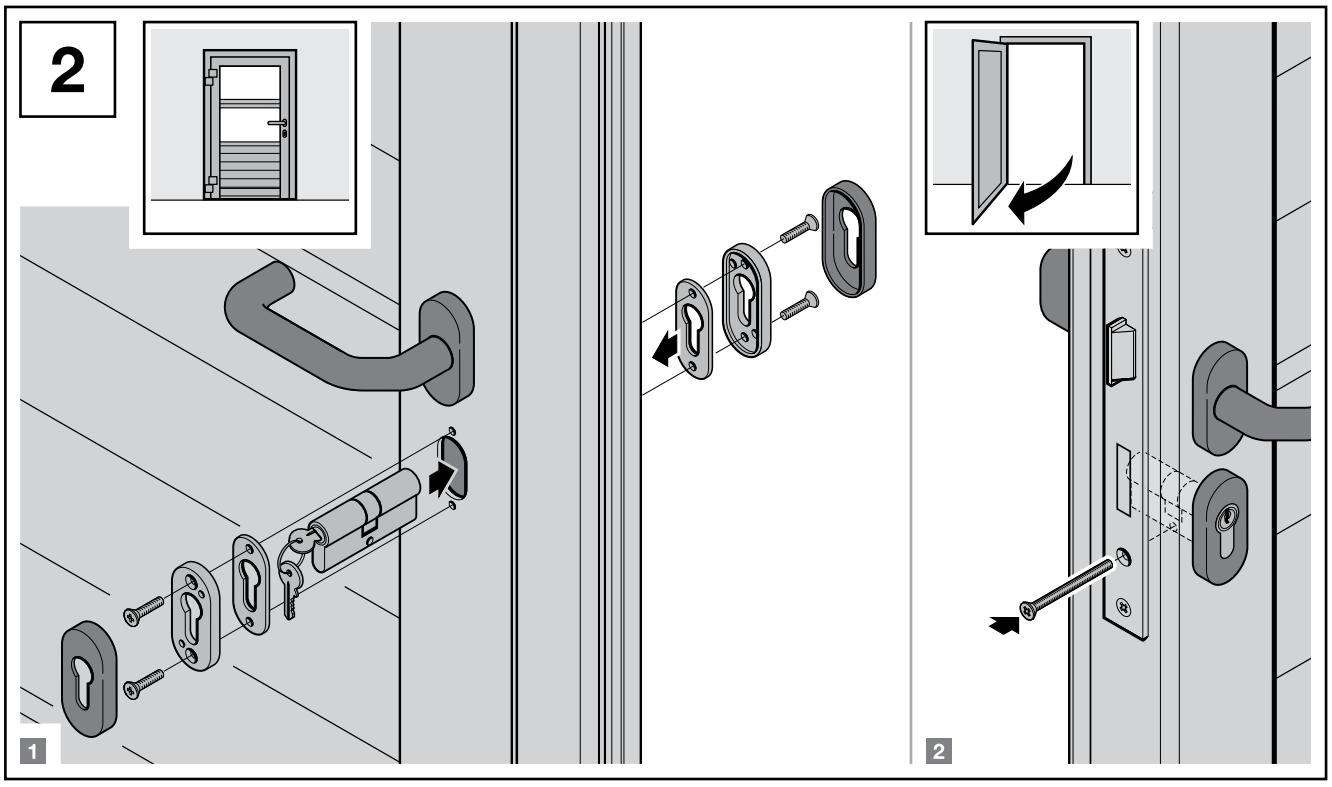
2
1
2

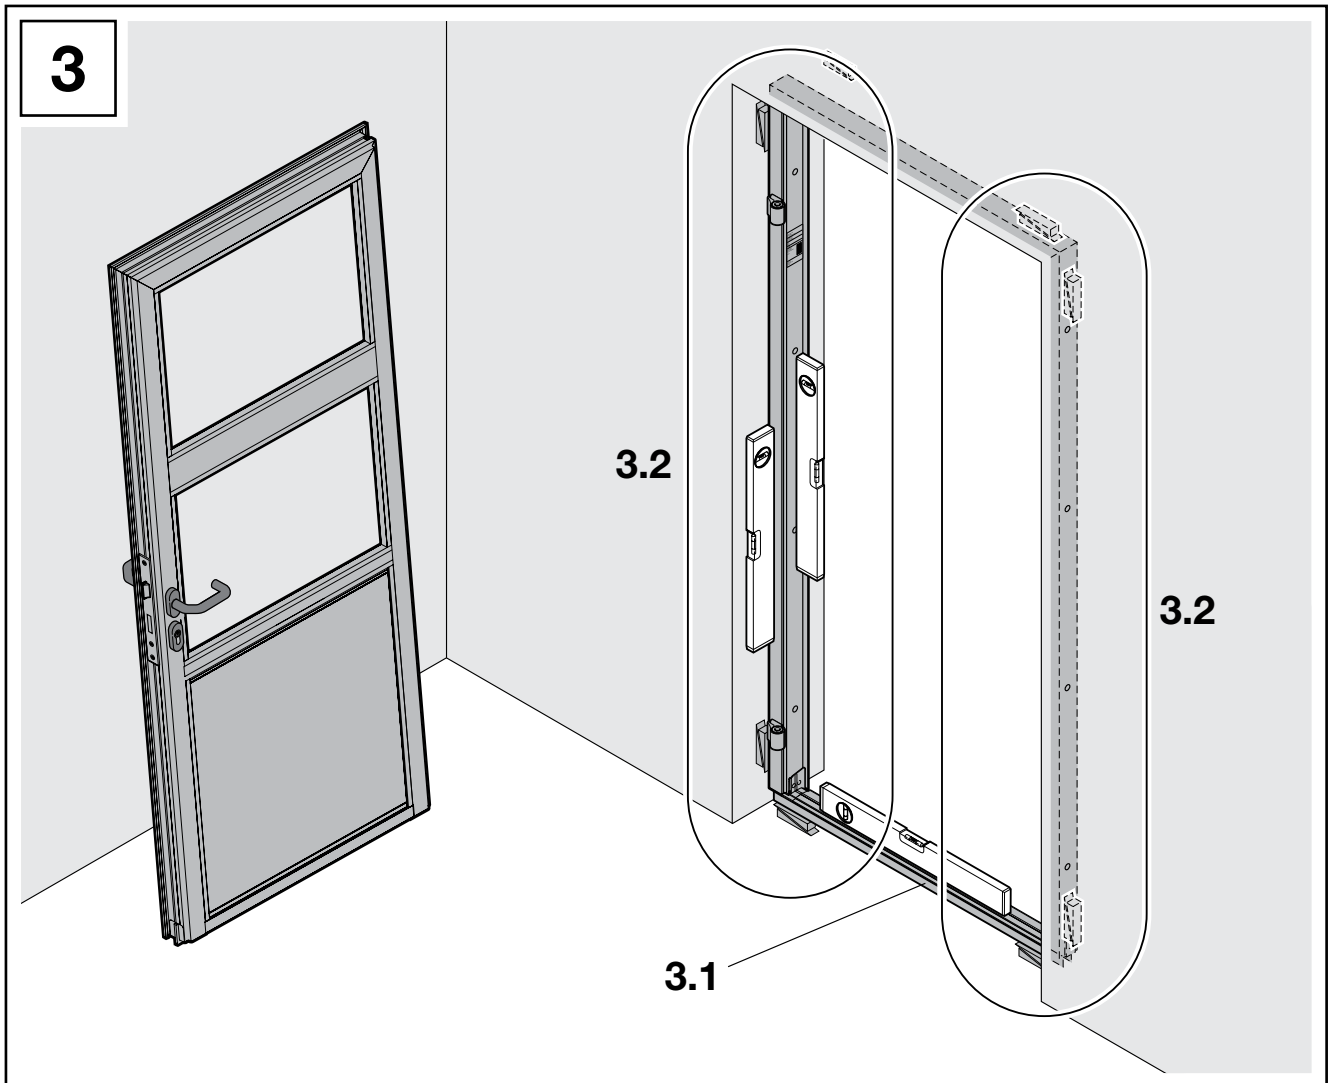
3
3.2
3.2
3.1

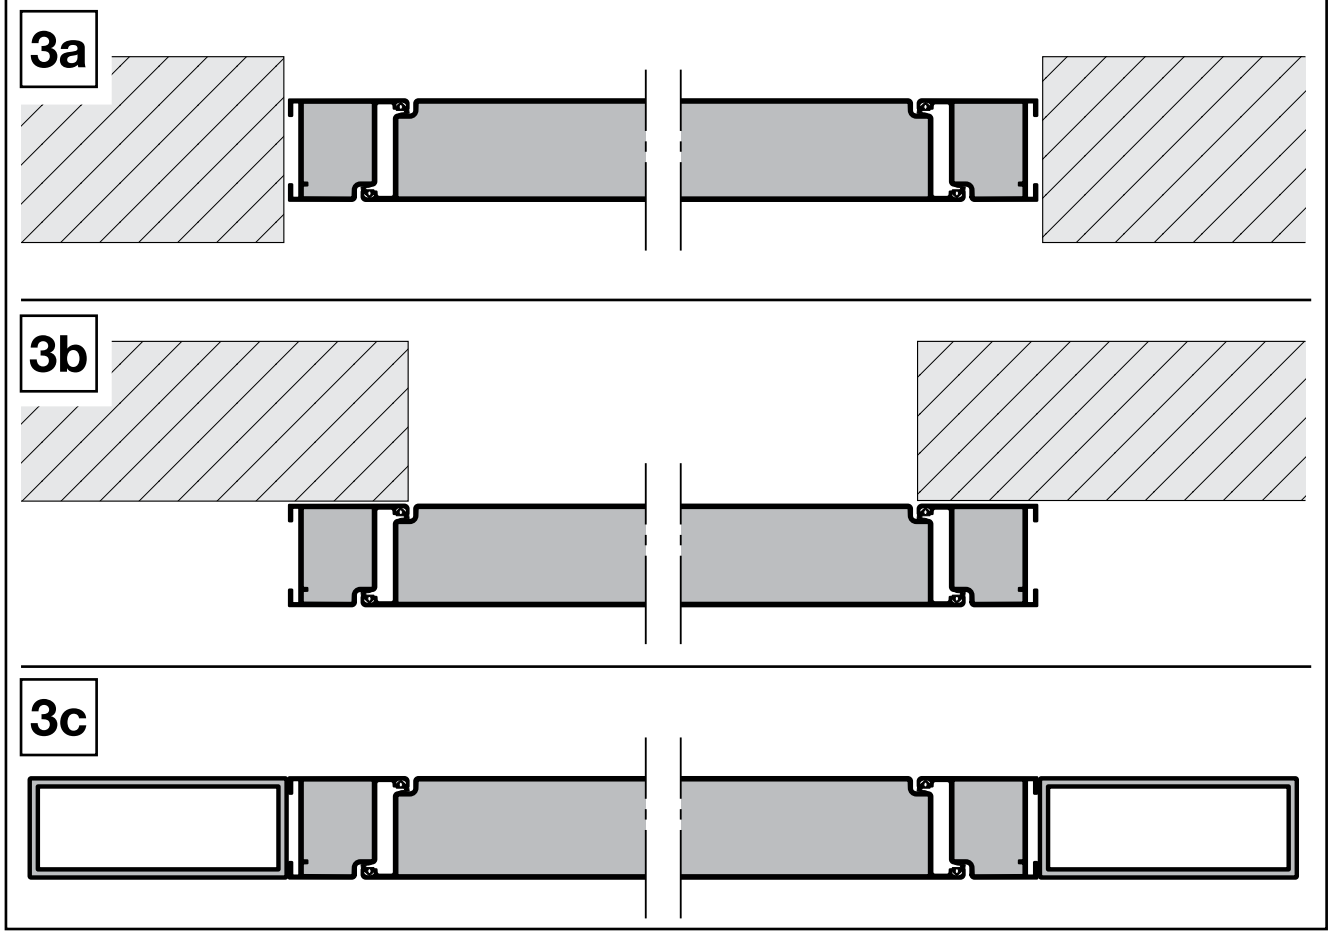
3a
3b
3c

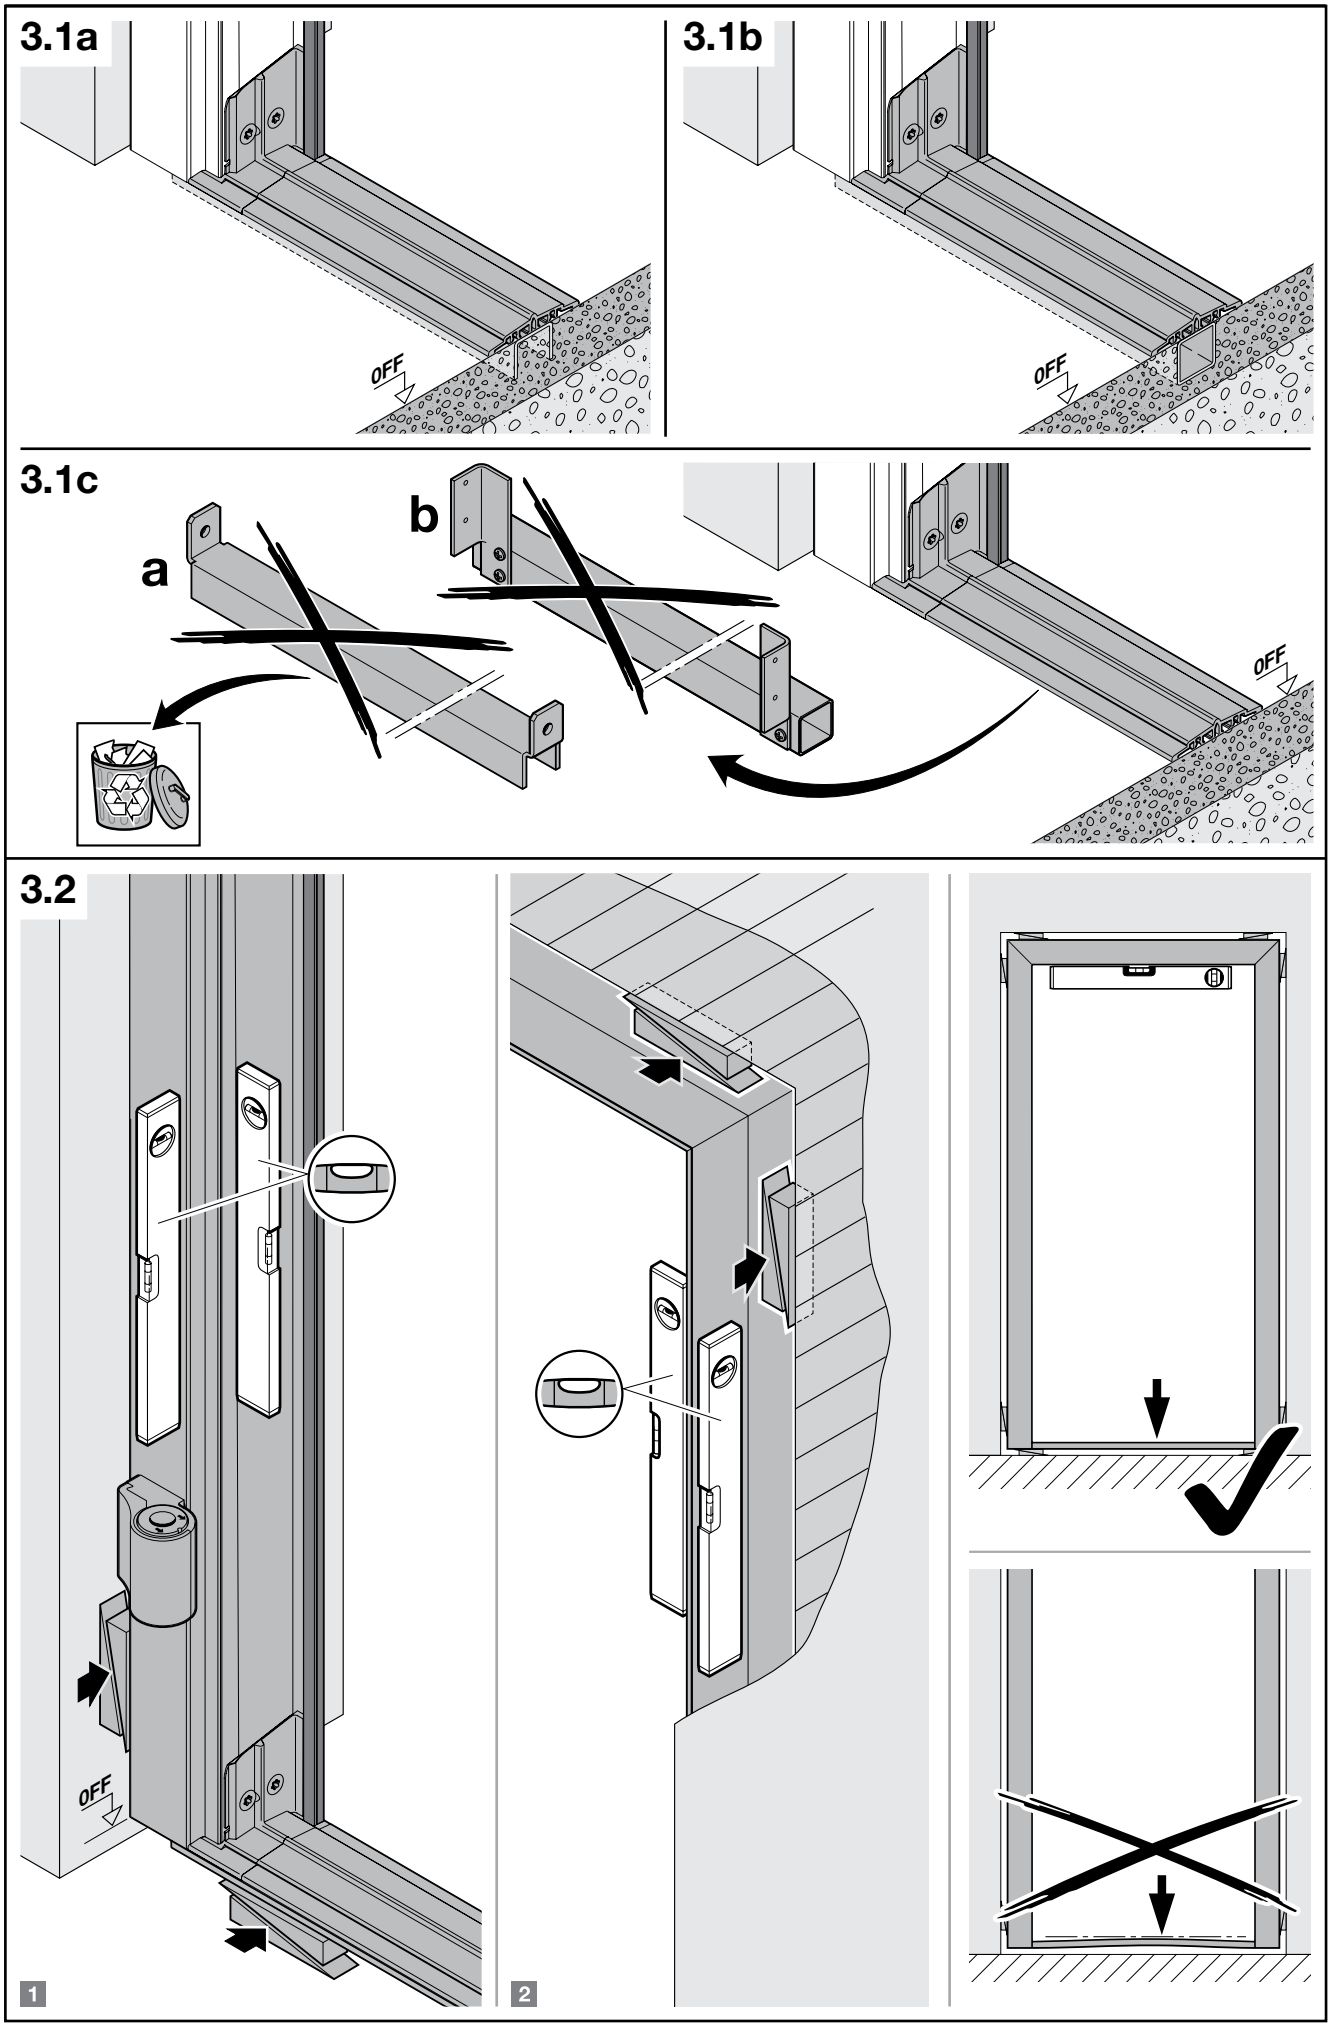
3.1a
OFF
3.1b
OFF
3.1c
a
b
OFF
3.2
OFF
1
2

4

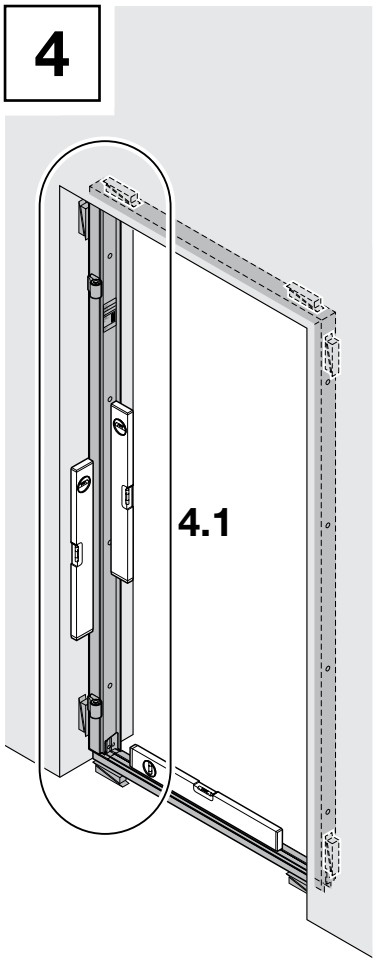

4.1 A

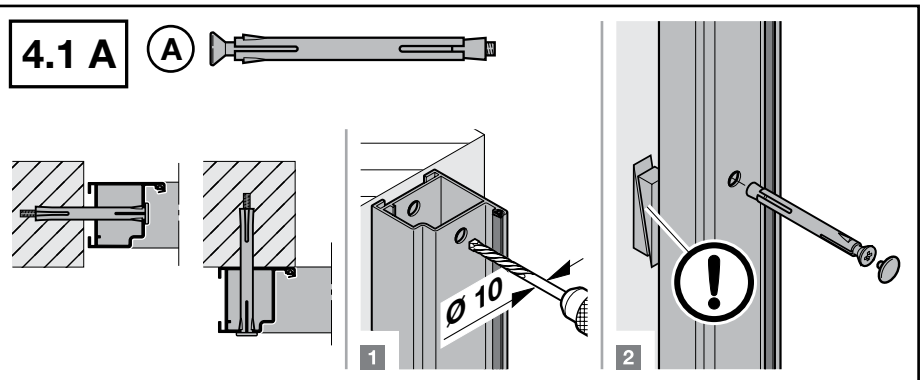

4.1 B

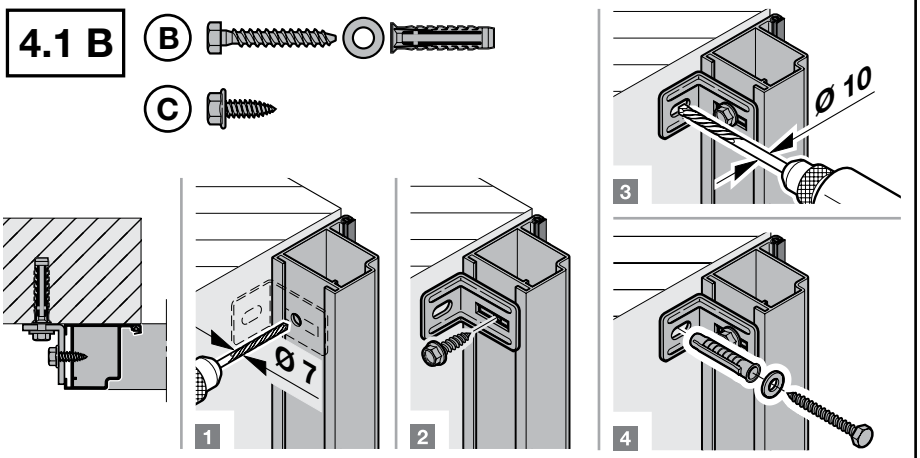

4.1 C

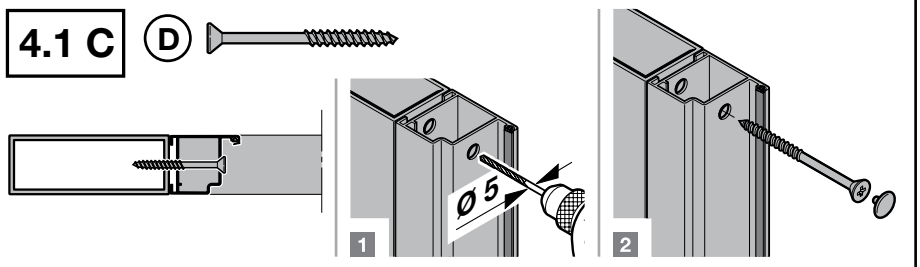

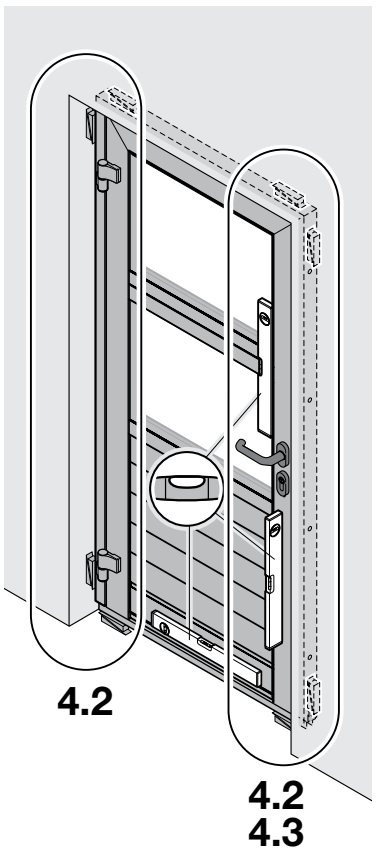

4.2

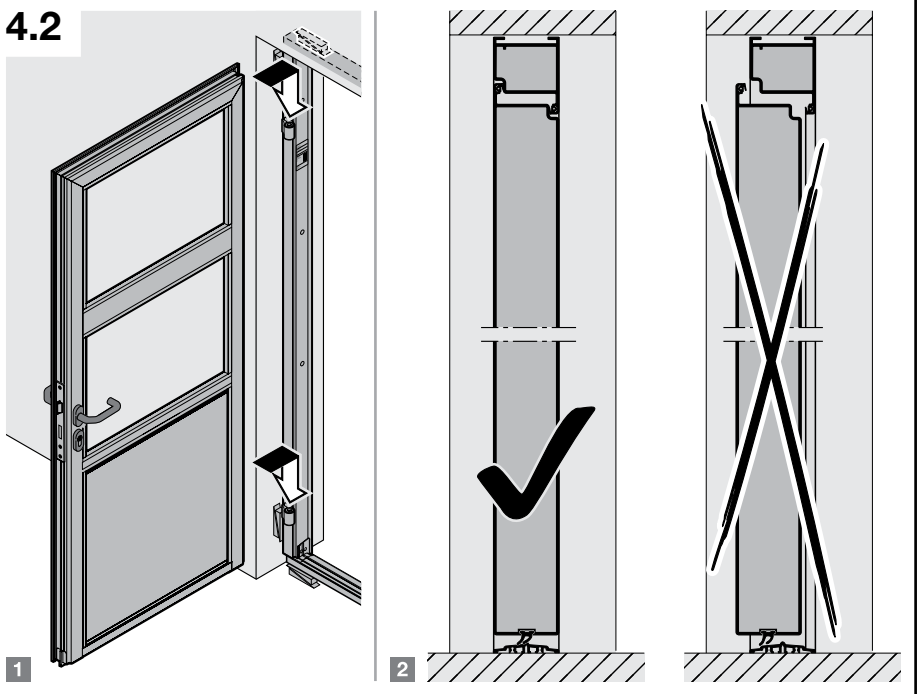

4.3

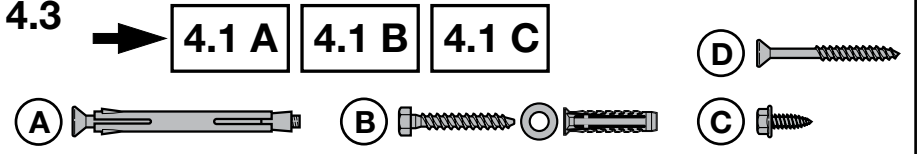

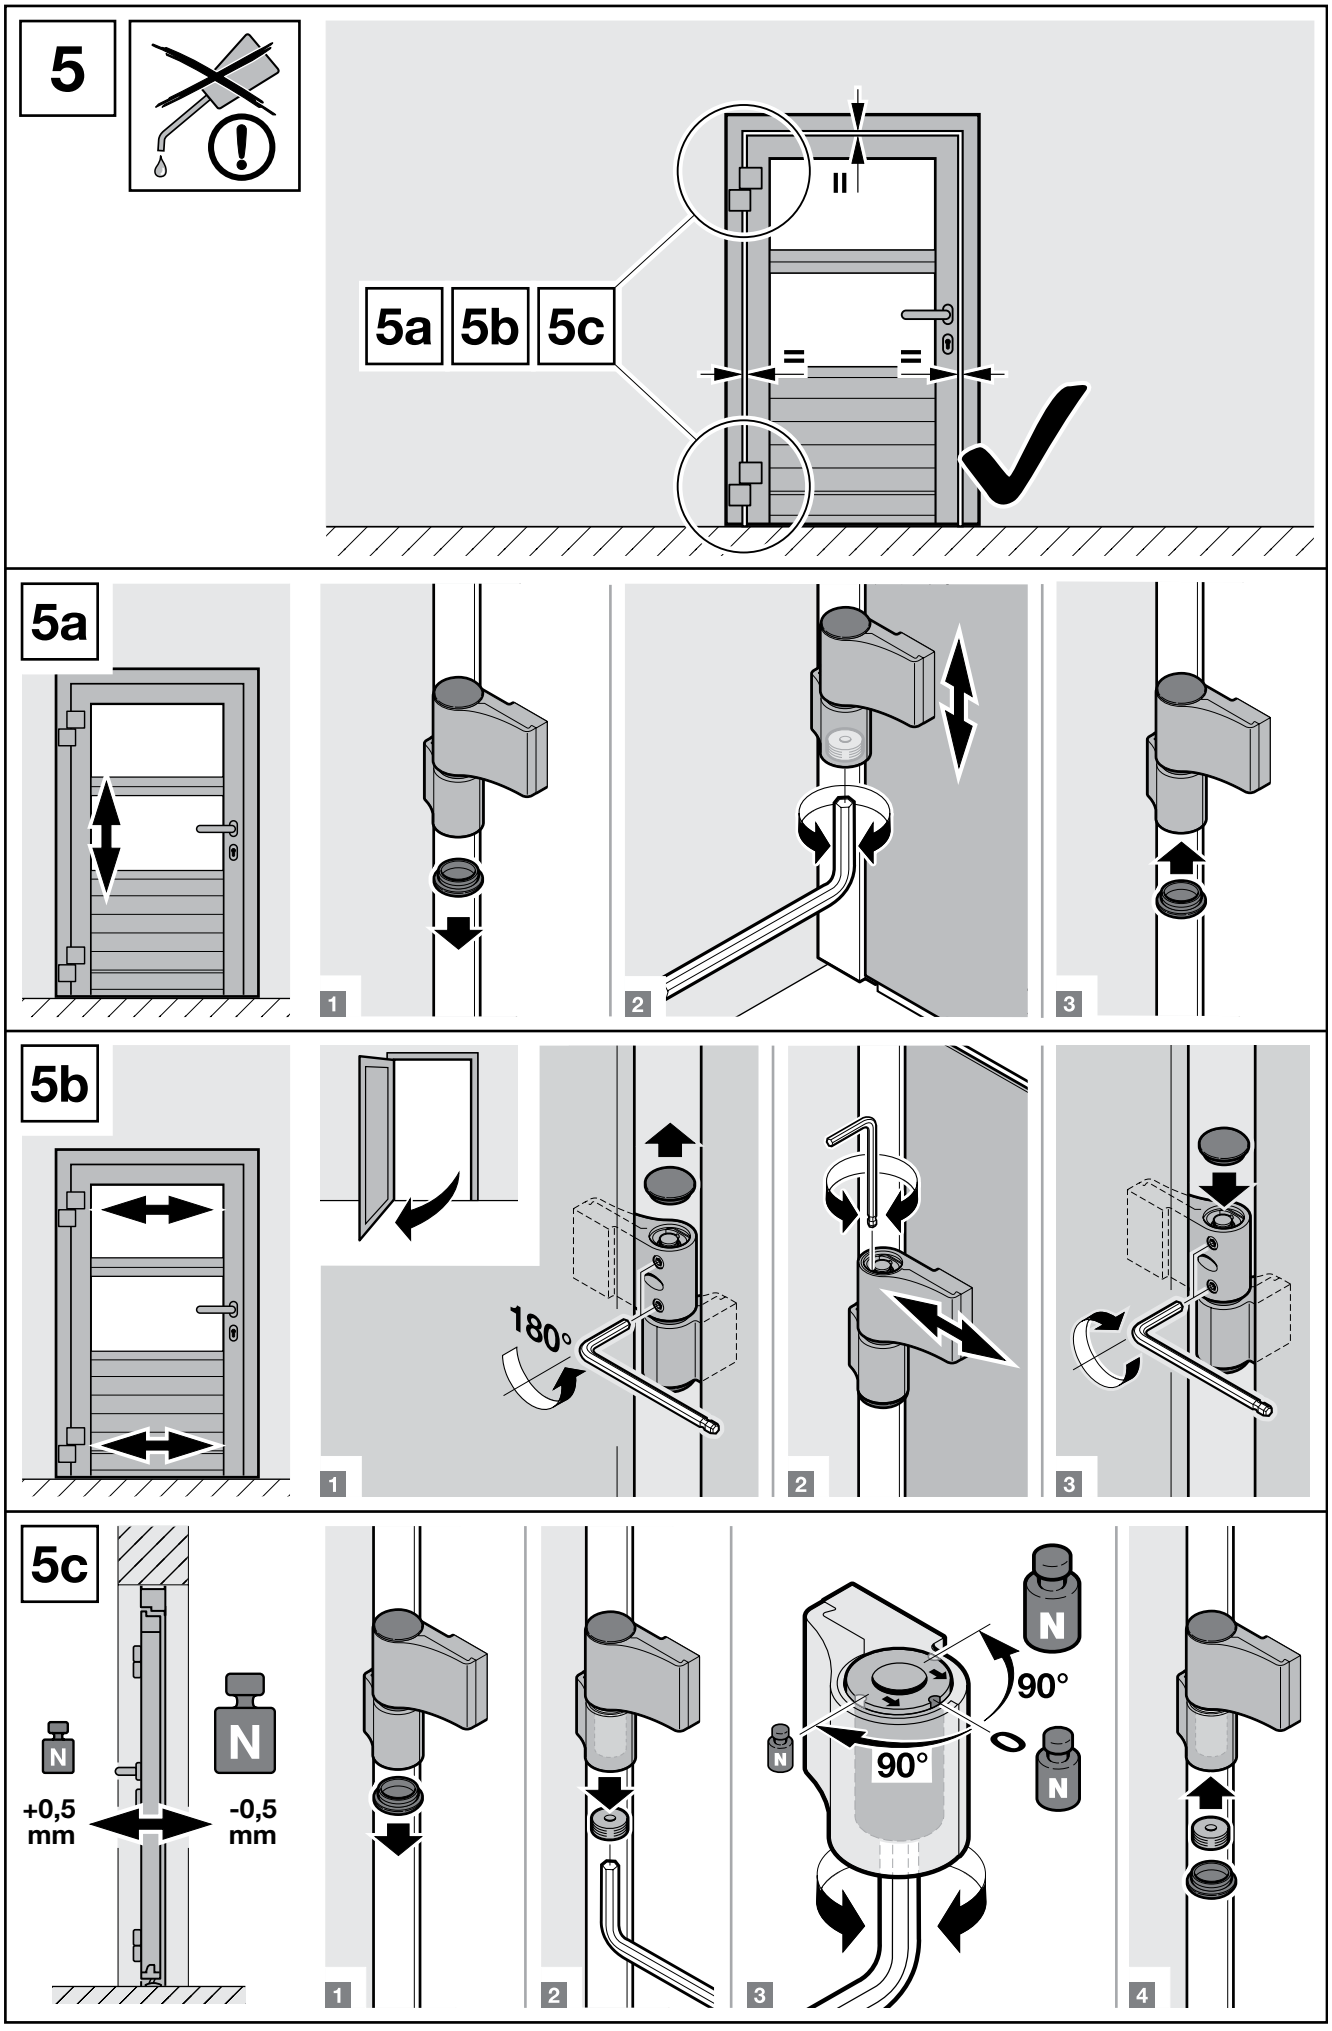
5
5a 5b 5c
II
5a
1
2
3
5b
180°
1
2
3
5c
N
N
+0,5 mm
-0,5 mm
1
2
3
N
90°
90°
N
4

6

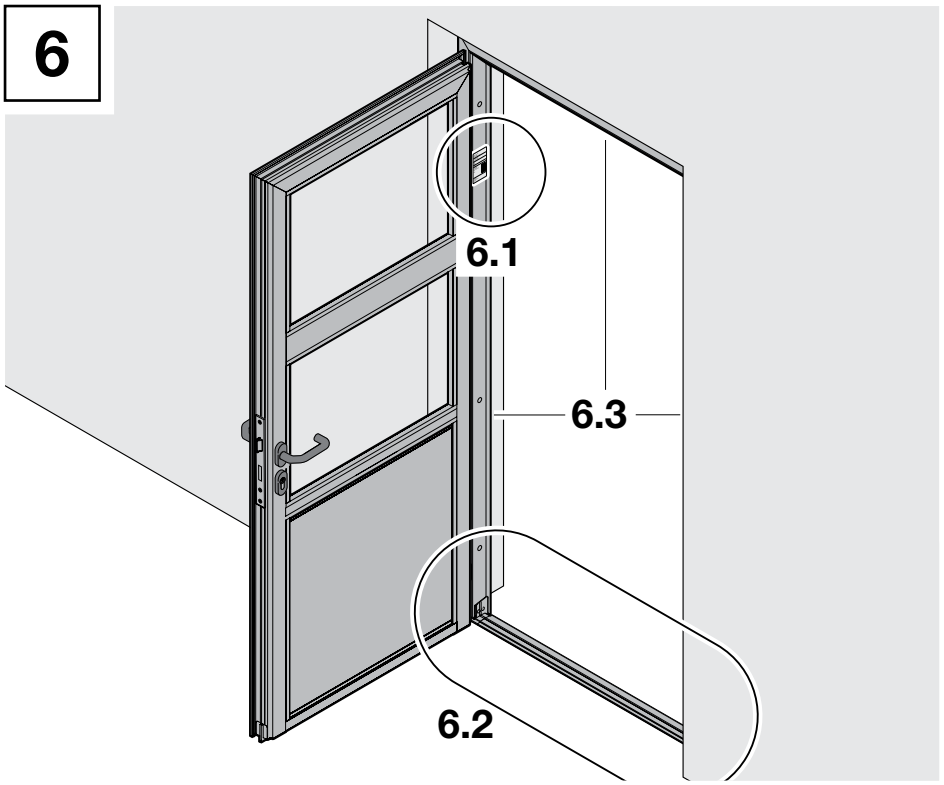

6.1

Auftrags-Nr:
Order No:
No. de fabrication:

Produkt-Nr:
Product No:
No. de produit:

Typ:
Type:
Type:

RAM:

Profil-Typ:
Profiltype:
Type de profil:

DIN:

Baujahr:
Produced in:
Année:

6.2a

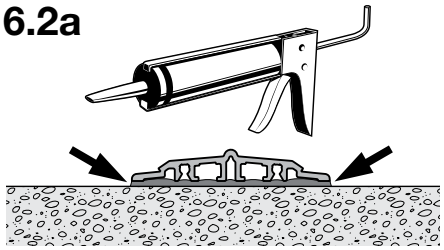

6.2b

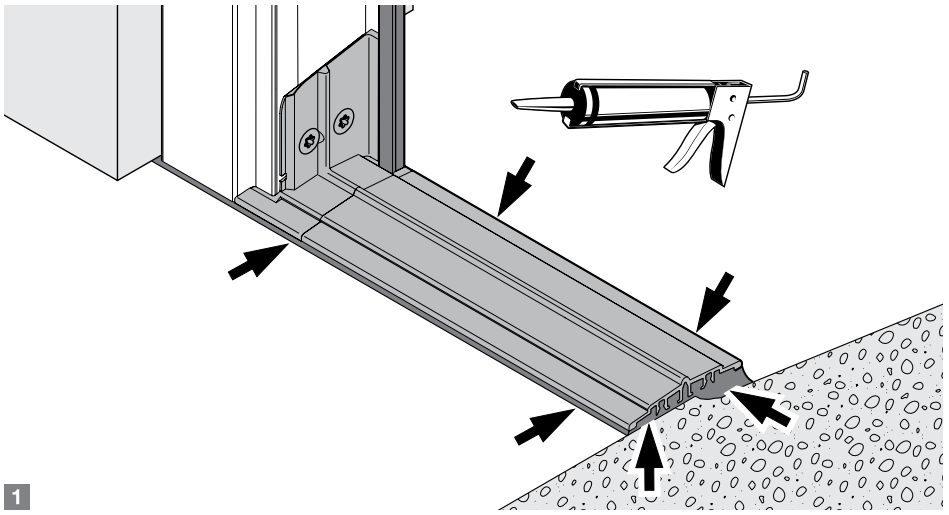

1

2

6.3a

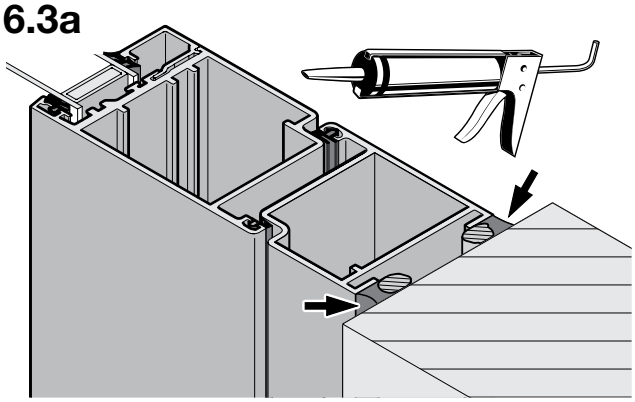

6.3b

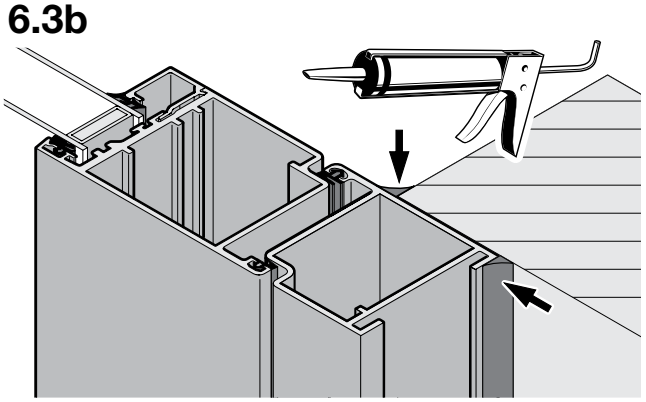

HÖRMANN KG Verkaufsgesellschaft
Upheider Weg 94-98
D-33803 Steinhagen
www.hoermann.com