

The World of Doors

Premium doors from the world market leader



EFAFLEX 
safe high-speed doors



Modern industrial doors for the highest demands.

Discover the whole world of EFAFLEX high-speed doors. We use innovative engineering to create individual industry solutions – with maximum reliability, safety, and efficiency. More than 1,400 employees worldwide ensure your complete satisfaction.





The world of doors at a glance.

COMPANY 06

QUALITY 08

SUSTAINABILITY 10

DIGITIZATION 12

WHY CHOOSE EFAFLEX? 14

PRODUCTS

HIGH-SPEED SPIRAL DOOR..... 16

- High-speed spiral door EFA-SST®
- High-speed spiral door EFA-SST® Essential
- High-speed spiral door parking systems EFA-SST® PS
- High-speed turbo door EFA-STT®
- High-speed turbo roll-up door EFA-STR®
- High-speed spiral door EFA-SST® Classic

HIGH-SPEED ROLL-UP DOORS 26

- High-speed roll-up door EFA-SRT® Premium
- High-speed roll-up door EFA-SRT® ECO
- High-speed roll-up door EFA-SRT® Value
- High-speed roll-up door EFA-SRT® Soft Touch
- High-speed roll-up door EFA-SRT® EC
- High-speed roll-up door EFA-SRT® EasyFit



SPECIALIST APPLICATIONS

DEEP FREEZE 34

High-speed spiral door EFA-SST® ISO-60
High-speed spiral door EFA-SST® TK-100

MACHINE PROTECTION 38

High-speed roll-up door EFA-SRT® MS Performance
High-speed roll-up door EFA-SRT® MS
High-speed roll-up door EFA-SRT® MS USD
High-speed spiral door EFA-SST® MS

CLEAN ROOM 44

High-speed roll-up door EFA-SRT® CR Premium
High-speed roll-up door EFA-SRT® CR Efficient
High-speed roll-up door EFA-SRT® CR-C
High-speed turbo door EFA-STT® CR

BURGLAR PROTECTION 52

High-speed spiral door EFA-SST® Secure (RC3, RC4)
High-speed spiral door EFA-SST® Efficient (RC2)

EXPLOSION PROTECTION 56

High-speed spiral door EFA-SST® EX
High-speed roll-up door EFA-SRT® EX

INTRALOGISTICS 60

High-speed roll-up door EFA-SRT® MTL
High-speed roll-up door EFA-SRT® MHT Compact

PERIPHERY & ACCESSORIES 64

EFA-SmartBuilding
EFA-SmartConnect®
EFA-3D-SCAN
EFA-SCAN® laser scanner
EFA-TLG® door light grid
Sensors and detectors
Contactless opening systems
EFA-TRONIC® door control

INDUSTRY SOLUTIONS 74

Custom-made solutions that are specifically tailored to the needs of your industry

SERVICE 78

Maintenance, testing, spare parts, repairs, troubleshooting, on-site advice and training

TECHNICAL DETAILS 82

All data and figures about the High-speed doors from EFAFLEX

EFAFLEX – Family business and global player.



THE WORLD LEADER IN HIGH-SPEED INDUSTRIAL DOORS

EFAFLEX has been exclusively dedicated to high-speed industrial doors since 1974. Our vision from then has developed into our technological edge today – it determines our thoughts and actions for tomorrow: Worldwide leader in high-speed industrial door technology.

As the only manufacturer in the field of high-speed industrial doors, EFAFLEX is listed in the world market leader index and is therefore one of the top companies in Germany, Austria, and Switzerland. The family-owned company employs more than 1,400 people worldwide and works for clients ranging from industry, trade and food production to the chemical and pharmaceutical sectors.



Quality on all levels. For your success.

Performance at the highest level is a long-standing tradition at EFAFLEX. Trust our innovative designs for high-speed industrial doors, which meet the highest standards of functionality, reliability and quality. We use the best quality components, most of which come from our own development and production. With EFAFLEX doors you buy quality that quickly pays for itself.



With our doors, we meet your high demands regarding performance, quality and safety every day, worldwide. That is why EFAFLEX has been your reliable partner for premium doors for around 50 years.



QUALITY DOORS FROM THE MARKET LEADER

With the development of the spiral door, EFAFLEX revolutionized and shaped the entire industry with this innovation in the technical world. Whether spiral, roll-up or folding door, whether clean room or machine protection door - EFAFLEX sets standards in premium quality.

You benefit from the long service life, low wear and tear, and the consistently low operating costs of your doors. Combined with our high service quality for maintenance and repairs, with EFAFLEX you can rely on the best partner for your door system.



SERVICE QUALITY


Around the clock and around the world: The company's own EFAFLEX service technicians are always at your side throughout Germany. All employees in our international service network also receive extensive training on a regular basis.



HOLISTIC QUALITY MANAGEMENT

EFAFLEX doors are able to operate under extreme conditions. The highest standards of quality and safety are therefore our top priority. All relevant company processes are revised by our internal quality management department.

In 2005, EFAFLEX was the first door manufacturer to have its high-speed industrial doors regularly tested by the ift Rosenheim for the durability of their performance characteristics. Additionally, the company has been consistently certified by the ift since 2008.

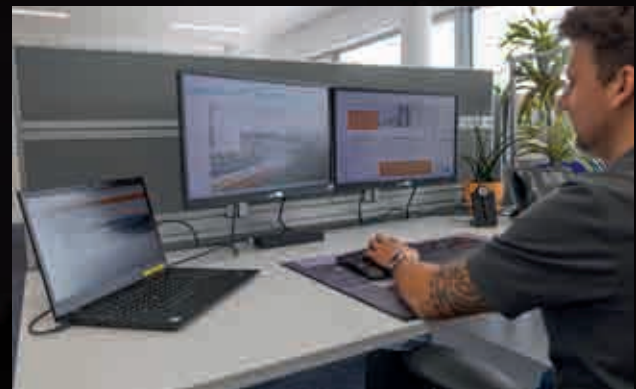

DATA QUALITY

From planning to completion: EFAFLEX works with the world's leading BIM platforms (Building Information Modeling). This makes the cost calculations and planning of your building simpler, faster, safer, and more accurate.



Our doorway to more sustainability.

As a family-owned company, we think and act holistically. That's why we produce premium doors with a long service life, low wear and tear and low operating costs. Optimise your energy and operating cost balance with EFAFLEX and save valuable resources in the long term.

WITH EFAFLEX HIGH-SPEED DOORS SAVE UP TO €5,000 ON ENERGY COSTS AND 12 TONNES OF CO₂ PER YEAR:



HIGH OPENING AND CLOSING SPEEDS

With opening and closing speeds of up to 4 m/s, EFAFLEX high-speed doors ensure low air exchange and effectively counteract heat loss. With this you reduce your energy consumption and your CO₂ emissions in the long-term.



HIGH QUALITY MATERIALS

Thanks to high-quality materials and intelligent design, our doors can be recycled by type. We prefer to purchase aluminium, steel and electrical components from local and European suppliers – taking material compliance into account.



OPTIMISED THERMAL INSULATION

EFAFLEX high-speed doors are characterised by their particular tightness and excellent thermal insulation, which reduce heat loss and prevent thermal bridges, lowering your heating costs in the long-term. This way, U-values of less than 1 W/m²K can be achieved.




GUARANTEED LONGEVITY

While doors from other manufacturers need to be replaced after three to five years, EFAFLEX high-speed doors have a service life of more than 10 years and can achieve several million cycles. This saves energy and assembly trips and protects the use of resources, raw materials, and production energy. This is officially documented by the EPD (Environment Product Declaration). In addition, the purchase pays for itself within a much shorter period of time.

The digital world of EFAFLEX.

Networked doors, online product platforms and digital business processes - when it comes to digitization, EFAFLEX is at the forefront. The areas of Industry 4.0, Smart Factory and Internet of Things are just as much a focus as the digitization of various work areas.

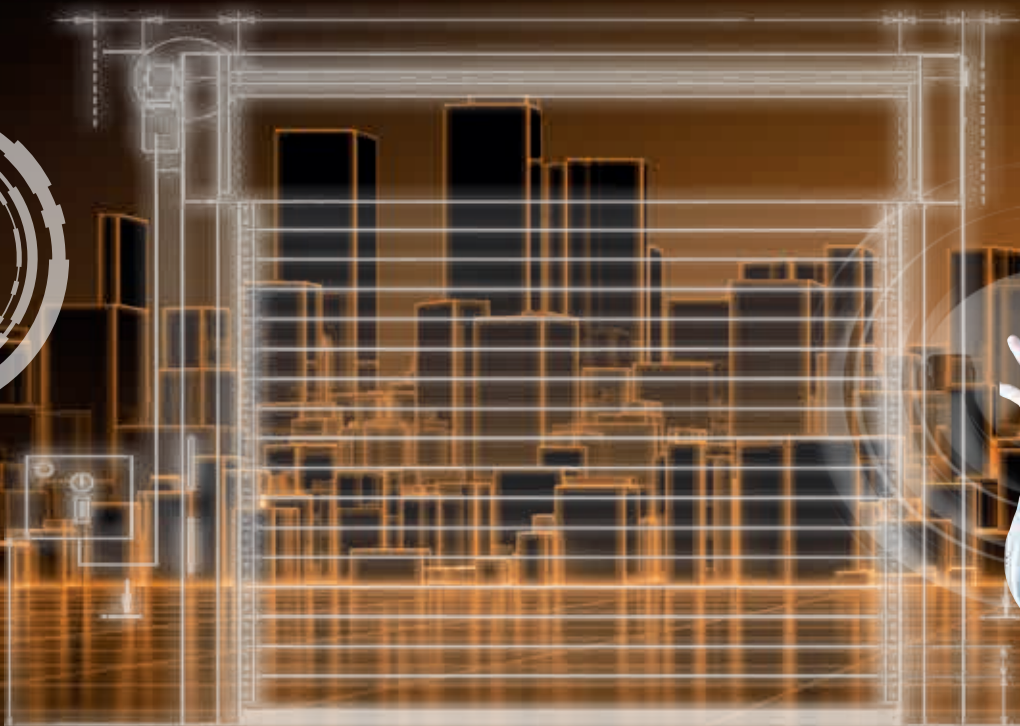

INTELLIGENT NETWORKING OF BUILDINGS AND DOORS: EFA-SMARTBUILDING

EFA-SmartBuilding enables the seamless integration of EFAFLEX doors into a higher-level building management system. This allows EFAFLEX doors to be controlled and managed centrally and efficiently together with other smart building components. The door and control data is provided in real time in a structured and high-quality format.

INTELLIGENT NETWORKING: EFA-SMARTCONNECT®

With EFA-SmartConnect®, EFAFLEX offers the IoT solution for intelligent, networked doors. The free, user-friendly app enables central monitoring and displays the status of all doors clearly and in real time. According to the diagnosis – service – maintenance principle, you can prevent faults in good time and also plan maintenance in advance. This not only minimises downtimes, but also lowers operating costs.



**VIDEO SUPPORT BY SMARTPHONE:
EFA-SMARTASSIST®**

Do you have a request where the factors of response and travel time or costs are critical? With EFA-SmartAssist®, a normal phone call becomes a solution-oriented video support. You will be invited to the digital assistant via SMS on your smartphone without having to install an app. With the data protection-compliant functions such as live video, chat, location or HD photo, we can carry out a digital fault analysis and elimination for you and in many cases a damage assessment without being on site.

**CREATE DIGITAL PLANS:
WITH BIM (BUILDING INFORMATION MODELING)**

EFAFLEX is currently represented in seven categories with over 50 different door types in German, English, and French on the world's leading BIM platforms. The BIM models are available for the three most popular programs- Revit, AutoCAD, and ArchiCAD.

Why choose **EFAFLEX?**



TAKE INNOVATIVE APPROACHES TOGETHER



With an EFAFLEX high-speed door, you decide in favour of one of the world's leading technology and benefit exclusively from our technical advantage. We are passionate about the high-quality production of high-speed doors and always strive for improvement. That is why we are constantly working on continuous improvements of our products and developing new solutions for your areas of application.

KNOW-HOW YOU CAN TRUST



Our employees are outstandingly well trained and are always ready to help you – whether you require basic advice on our doors or have specific demands for a special project, we are always there for you.

THINK ABOUT SUSTAINABILITY AND PASS IT ON




As a family-owned business, we understand how important sustainable work is to enable future generations to live and work. Our actions are therefore characterised by sustainability and environmental awareness. With our services and products, we pass these values directly on to you.

QUALITY THAT PAYS



Our self-image of innovative engineering is the basis for the top quality of our high-speed doors. Based on ground breaking constructions, we create technology that enables maximum reliability, efficiency, and durability. Premium quality pays off – you save permanently.






**High-speed
spiral doors**

**When speed
is of the essence.**

The spiral. Often imitated – but unrivalled to this day.

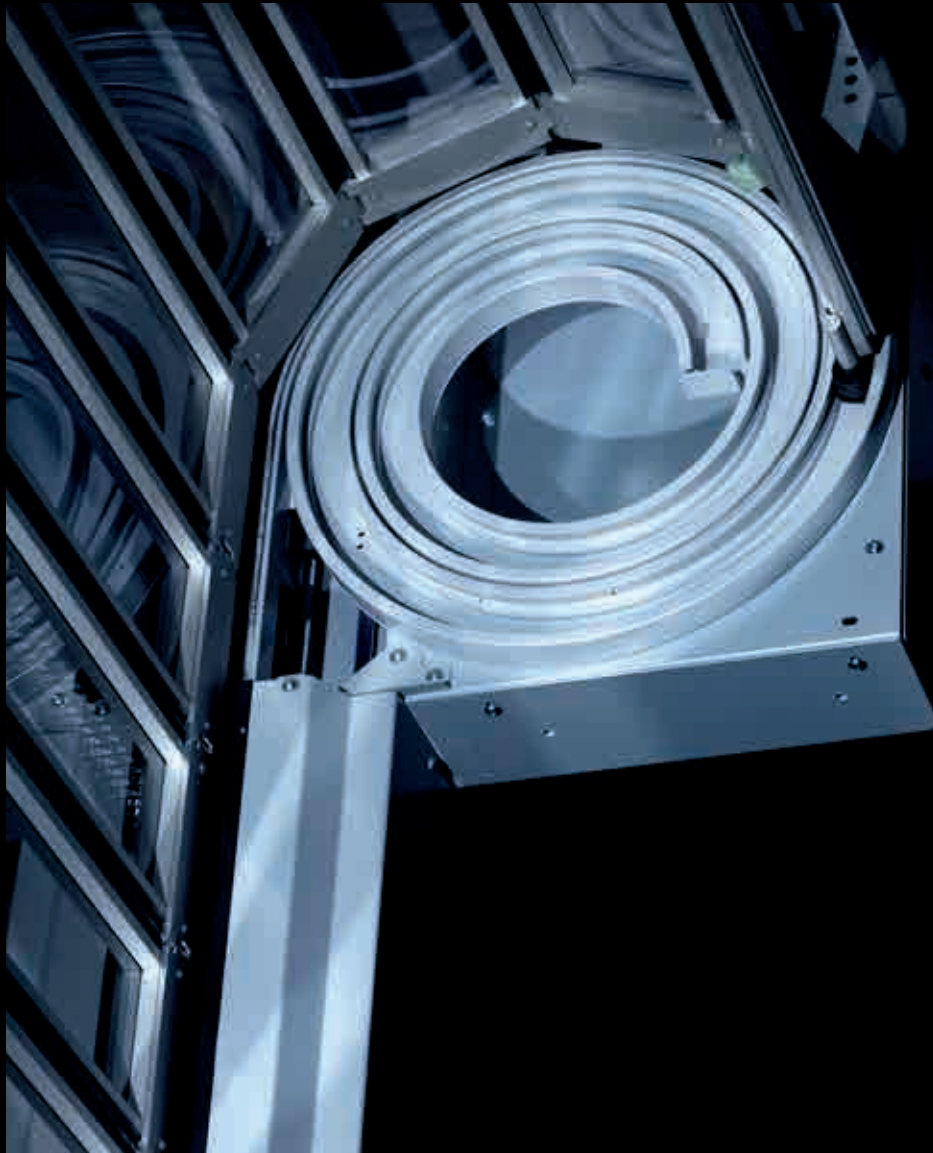

It was more than 30 years ago that EFAFLEX invented the high-speed spiral door, and it has been further developed on a consistent basis as an innovation leader ever since. The EFAFLEX spiral door stands for door leaf guidance to perfection: the door leaf is not wound on a shaft, but kept at a space-saving distance by the spiral-shaped guidance system. Thanks to this mechanical principle, the spiral doors from EFAFLEX operate exceptionally quietly, are almost wear-free and extremely fast.

The high-speed spiral door technology from EFAFLEX remains unrivalled to this day and exemplary for worldwide door technology. No other design is able to combine the highest opening speeds, durability and effectiveness so well. Our high-speed spiral doors are also available in a wide range of designs and can be installed where space is limited.

Spiral door technology in perfection.

EFA-SST®

The EFA-SST® high-speed spiral door represents a modern generation of industrial doors: perfect insulation, energy-efficient functionality, state-of-the-art technology. During the technical redesign, particular attention was paid to improving the physical properties of the door leaf as well as optimising the functionality, thus once again raising the standard of EFAFLEX industrial doors.

EFA-SST® AT A GLANCE:

- Max. heat insulation with EFA-THERM® laths
- Opening speed up to 2.5 m/s
- Closing speed up to 1.0 m/s
- Highest wind load capacity
- Top safety devices
- Up to 250,000 operating cycles p.a.
- Also available in low-header design
- Standard sizes of up to w=10,000 mm, h=12,000 mm






EFA-SST® ESSENTIAL AT A GLANCE:

- Excellent acoustic and thermal insulation
- Wind resistance class 2 – 4
- Up to 100,000 load cycles p.a.
- Suitable for external and internal applications
- Opening speed of up to 0.5 m/s
- Standard sizes of up to w=4,500 mm, h=5,000 mm

The entry-level door with best price-performance.

EFA-SST® Essential

Powerful, robust, economical: An attractive purchase price and the consistently high quality standards that are customary to EFAFLEX make the EFA-SST® Essential high-speed spiral door the price-performance champion. The homogeneous design of the spiral guarantees a smooth running performance while also maintaining a high-speed up to 0.5 m/s.

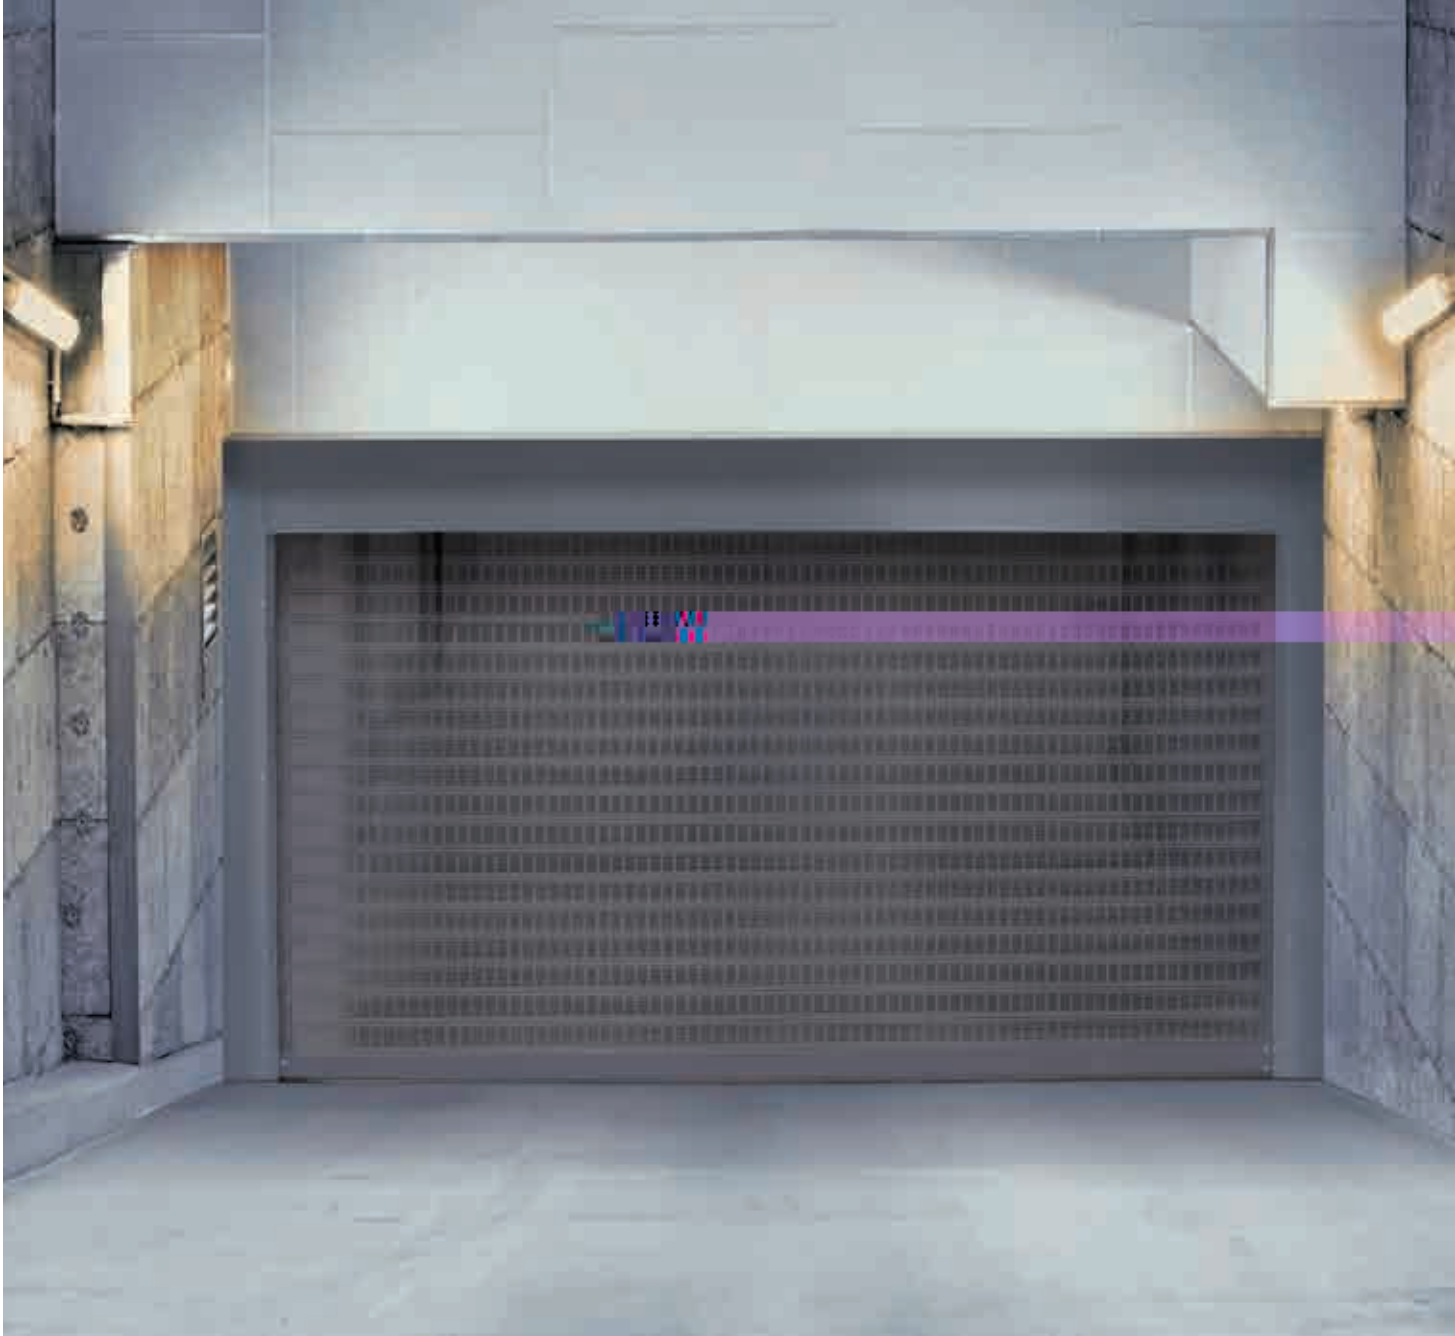

The fastest parking garage door in the world.

EFA-SST® PS

The EFA-SST® PS is a space-saving door specially developed for parking and garage systems. This door can be optimally installed even with minimal space in the lintel or side case area. In addition, it also features the typical properties of every EFAFLEX high-speed door: safe, reliable and incomparably fast.

EFA-SST® PS AT A GLANCE:

- Space-saving construction
- Opening up to 1.8 m/s
- Closing up to 1.0 m/s
- Highest wind load capacity
- Top safety devices
- Optionally with EFA-VENT® ventilation laths
- Up to 200,000 operating cycles p.a.
- Standard sizes of up to
w=6,100 mm, h=4,000 mm



The transparent turbo door.

EFA-STT®

Thanks to laths made of crystal-clear acrylic glass, the door leaf of the EFA-STT® is over 70 percent transparent – this makes it a unique high-speed door worldwide: robust and yet almost completely see-through. The ability to see through the door offers advantages where two-way traffic occurs: Accidents are prevented and smooth transport operations are guaranteed.

EFA-STT® AT A GLANCE:

- The door leaf consists at 70% of crystal clear acrylic glass
- Opening speed up to 3.0 m/s
- Closing speed up to 1.0 m/s
- Highest wind load capacity
- Top safety devices
- Up to 200,000 operating cycles p.a.
- Also available in low-header design
- Standard sizes of up to w=8,000 mm, h=7,800 mm





EFA-STR®
AT A GLANCE:

- Opening speed up to 4.0 m/s
- Closing speed up to 1.0 m/s
- Highest wind load capacity
- Top safety devices
- Up to 250,000 operating cycles p.a.
- Standard sizes up to
w=7,000 mm, h=6,000 mm

The fastest vertically opening door.

EFA-STR®

The high-speed turbo roll-up door EFA-STR® opens at an incredible speed of up to 4 m/s thanks to its spiral technology, making it our fastest vertically opening door. With the EFA-STR®, your logistic processes become faster and more efficient. The combination of a spiral door leaf support and flexible curtain ensures an optimal traffic flow.

The pioneer in spiral technology. **EFA-SST® Classic**


Copied a thousand times, yet still unequalled. The tried and tested fundamental principle of EFAFLEX high-speed spiral doors remains unbeatable! The door leaf is not rolled up on a shaft, but is guided into the EFAFLEX spiral instead, saving space and operating virtually wear free.

EFA-SST® CLASSIC AT A GLANCE:

- Aluminium laths double-walled
- Opening speed up to 2.0 m/s
- Closing speed up to 1.0 m/s
- Highest wind load capacity
- Top safety devices
- Up to 250,000 operating cycles p.a.
- Standard sizes of up to
w=8,000 mm, h=7,000 mm







**High-speed
roll-up doors**

**Versatility as
a concept.**



**EFA-SRT® PREMIUM
AT A GLANCE:**

- Clean room version available
- Hygiene version available
- Heavy-duty inside door
- With optional crash protection
- Opening speed up to 2.0 m/s
- Closing speed up to 0.75 m/s
- Up to 150,000 operating cycles p.a.
- Standard sizes up to
w=5,000 mm, h=5,500 mm

The reliable all-rounder. **EFA-SRT® Premium**

The heavy duty roll-up door EFA-SRT® is a real all-rounder! It can be used as an inside door or as an additional hall closure. The high-speed roll-up door EFA-SRT® Premium is a high-quality solution especially for areas that are frequently used by forklifts. EFA-FLEX roll-up doors are available in galvanised steel or stainless steel. For reliable, long-lasting operation of the roll-up doors, all components are streamlined and are characterised by high ease of maintenance.

The economical interior door.



EFA-SRT® ECO

The EFA-SRT® ECO roll-up door is an extremely economical door system. Special structural preparations are not necessary due to the space-saving design, for example, its very slim side door frames. Thus, the EFA-SRT® ECO can be applied in more situations than any other roll-up door.

EFA-SRT® ECO AT A GLANCE:

- Ideal for material-handling technology
- Space-saving design
- Excellent price-performance ratio
- With optional crash protection
- Opening speed up to 2.0 m/s
- Closing speed up to 1.0 m/s
- Up to 150,000 operating cycles p.a.
- Standard sizes up to w=6,000 mm, h=7,000 mm







The flexible multi-talent. **EFA-SRT® Soft Touch**

The EFA-SRT® Soft Touch high-speed roll-up door is an interior door specially designed for intensive industrial use. It is collision-resistant, reliable, space-saving and low-maintenance and therefore particularly recommended for areas of application with heavy passenger traffic. The door system has a collision protection and offers high operational safety thanks to a flexible closing edge.

EFA-SRT® SOFT TOUCH AT A GLANCE:

- With frequency converters
- Control on the door frame
- With self-repairing door curtain as standard
- Door closure is flexibly deformable
- Opening speed up to 2.0 m/s
- Closing speed up to 0.75 m/s
- Up to 150,000 operating cycles p.a.
- Standard sizes up to w=4,000 mm, h=4,000 mm



**EFA-SRT® EC
AT A GLANCE:**

- Easy to clean
- Space-saving design
- Slanted end shield and winding shaft cover
- In stainless steel design
- Frame extension is possible on one or both sides
- Opening speed up to 2.0 m/s
- Up to 150,000 operating cycles p.a.
- Standard sizes up to w=4,000 mm, h=4,000 mm

The hygienic high-speed roll-up door. **EFA-SRT® EC**

The EFA-SRT® EC (Easy Clean) was developed in close cooperation with the food industry. The hygienic high-speed roll-up door is the optimal solution for all internal passages with high requirements regarding hygiene, for example in the food industry. The EFA-SRT® EC is the only hygienic roll-up door for the food industry recommended by the German Association of Food Inspectors (BVLK).

The slim all-rounder.

EFA-SRT® EasyFit

The EFA-SRT® EasyFit offers an outstanding price-performance ratio and a very easy and quick installation. Thanks to its space-saving and slim design, even two door systems can be installed flush next to each other. The EasyFit can withstand even the highest loads, as up to 150,000 load changes per year are possible and it can be opened at up to 1.5 meters per second. At the same time, the door light grid also ensures that the highest safety standards are guaranteed.

EFA-SRT® EASYFIT AT A GLANCE:

- Very quick assembly
- Space-saving and slim design
- Top price/performance ratio
- Increased security thanks to door light grid
- Opening up to 1.5 m/s
- Closing up to 1.0 m/s
- Up to 150,000 operating cycles p.a.
- Standard sizes up to
W=4,000 mm, H=4,000 mm







Doors in cooled spaces must withstand extremely high loads. Top quality and perfect workmanship are paramount for ensuring that all components are absolutely resistant to cold and humidity. Moreover, it is essential to avoid door downtime, otherwise the cold could escape and goods could thaw, which would result in higher energy consumption and costly waste.

EFAFLEX high-speed doors for deep freeze areas op-



EFA-SST® ISO-60
AT A GLANCE:

- Max. heat insulation with EFA-THERM® laths
- U value up to 0.8 W/m²K
- 60 mm thick door leaf
- Opening speed up to 2.5 m/s
- Closing speed up to 1.0 m/s
- Up to 250,000 operating cycles p.a.
- Standard sizes up to w=6,000 mm, h=6,000 mm

The lock-up door for thermo-regulated zones.

EFA-SST® ISO-60

Doors in cooled spaces must withstand extremely high loads. Top quality and perfect workmanship are paramount for ensuring that all components are absolutely resistant to cold and humidity. EFA-SST® ISO 60 is the ideal closing door for frequent openings with high requirements for insulation, as is the case in cooling rooms. The EFA-SST® ISO-60 combines two EFAFLEX door technologies into one innovative solution: the spiral and highly insulating laths. In addition, high-quality seals prevent air and temperature exchange. The combination of these components makes the EFA-SST® ISO-60 a supremely insulated door.

The specialist door for minus degrees.

EFA-SST® TK-100

The EFA-SST® TK-100 high-speed spiral door is the first true single-door solution for freezer areas. In addition to the highest opening and closing speeds, it achieves the best insulation values for spiral doors and thus represents a high-quality solution for every deep-freeze room.

EFA-SST® TK-100 AT A GLANCE:

- Optimal single door solution
- Air permeability class 5 according to DIN EN 12426
- Frames and laths thermally separated
- Almost hermetically sealed
- Opening speed up to 2.0 m/s
- Closing speed up to 0.5 m/s
- U value up to 0.62 W/m²K
- Up to 200,000 operating cycles p.a.
- Standard sizes of up to
w=4,500 mm, h=6,000 mm







Machine protection.

Highest safety standards and smooth processes.

Stable production cycles as well as rapid changes between product sealing and further processing without downtimes lead to increased demands on automated processes. Nevertheless, the safety of employees in production and manufacturing is of utmost importance, where the risk of incidents and accidents should be minimised.

Machine protection doors from EFAFLEX meet the highest safety standards for the protection of man and machine, all whilst guaranteeing smooth processes in your production. Our product portfolio for machine protection includes both high-speed roll-up doors and high-speed spiral doors.



EFA-SRT® MS PERFORMANCE AT A GLANCE:

- Functional safety performance level »d«
- Up to 1,000,000 cycles per year
- Transparent, easy-to-open door frames
- Self-assembly possible
- Rotatable drive in up to eight positions
- Maximum speed up to 2.0 m/s
- Door curtain made from flexible PVC
- Life cycle 12 years
- Standard sizes of up to w=6,200 mm, h=5,500 mm

The powerful machine protection door. **EFA-SRT® MS Performance**

The EFA-SRT® MS Performance can be flexibly adapted to the individual needs of custom requirements. Attachment components and fence connections can be mounted on the newly developed frames made of extruded aluminum profiles. In total, it is possible to optionally integrate up to four limit switches into the frames. This very low-maintenance door features, among other things, a foldable cover and detachable cable covers, which speeds up and facilitates servicing. Additionally, the transparent frame covers make it possible to install LED strips for a traffic light function.

The compact door for machine safety.

EFA-SRT® MS

Due to its space-saving and compact design, the EFA-SRT® MS high-speed roll-up door satisfies all requirements for optimum integration into the required safety guard. The door leaf is fully transparent and equipped with warning strips as a standard. Coloured, highly tear-resistant and transversely stable curtains as well as welding protection curtains are also readily available. All curtain versions are, of course, free of substances which are detrimental to paint adhesion.

EFA-SRT® MS AT A GLANCE:

- Functional safety performance level »d«
- Maximum speed up to 1.8 m/s
- Door curtain made from transparent flexible PVC
- Special curtains are available on request
- Up to 250,000 cycles p.a.
- Maximum of 7 cycles per minute
- Life cycle 12 years
- Standard sizes of up to w=5,000 mm, h=3,500 mm






EFA-SRT® MS USD AT A GLANCE:

- Use as a movable separating safety guard
- Door leaf made of flexible, transparent PVC
- Functional safety performance level »d«
- Opening speed up to 1.8 m/s
- Up to 250,000 operating cycles p.a.
- Maximum of 7 cycles per minute
- Life cycle of 12 years

The upside-down high-speed door. EFA-SRT® MS USD

The EFA-SRT® MS USD is the first EFAFLEX machine safety door that closes from the bottom up. This reliable, space-saving and low-maintenance upside-down high-speed door was developed specifically for heavy-duty industrial applications. A particularly powerful pulling device which pulls the end-shield upwards is installed in the door frames.

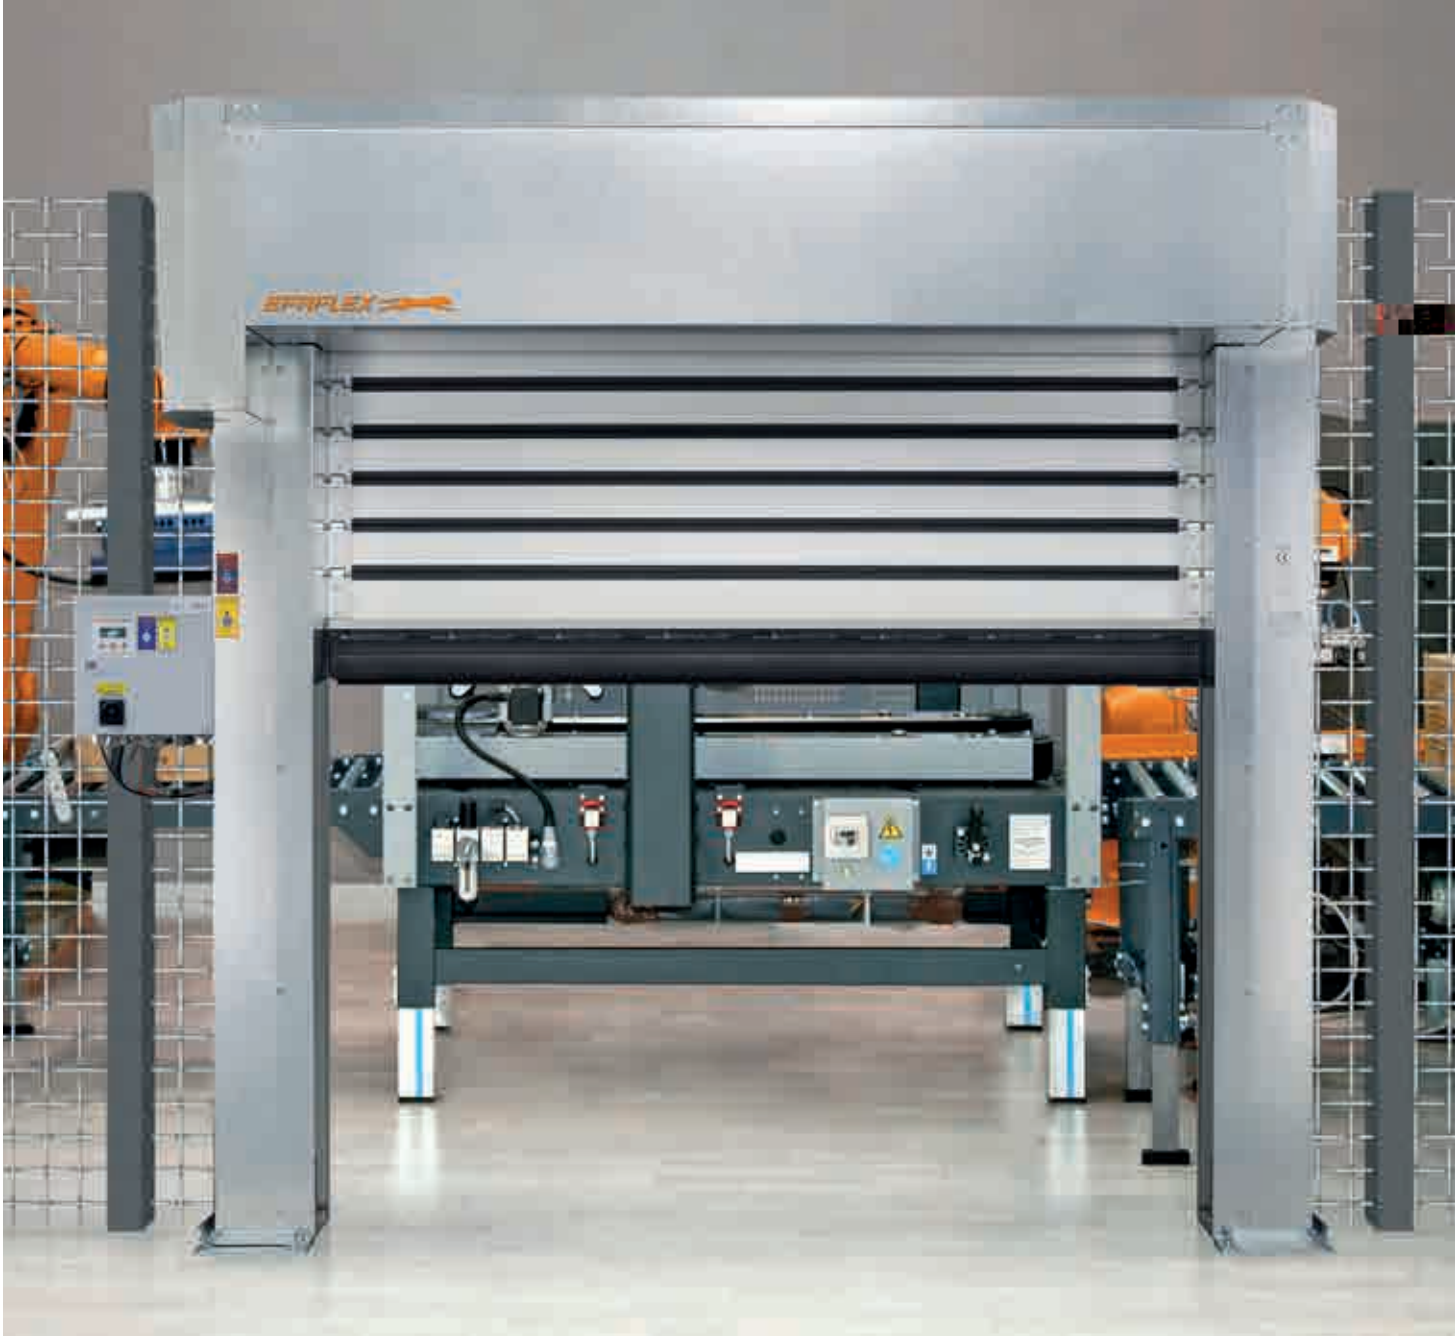

Machine protection door for the industry.

EFA-SST® MS

The EFA-SST® MS high-speed spiral door has been specially developed for industrial applications, as stand-alone separating safety guard that fulfils all requirements for a safe and modern machine protection door. We are the only manufacturer of industrial doors to also implement our spiral technology and the flexible hinge chain for optimum performance in our machine protection doors.

EFA-SST® MS AT A GLANCE:

- Functional safety performance level »d«
- Opening speed up to 2.7 m/s
- Compact extruded aluminium laths
- Up to 250,000 cycles p.a.
- Maximum of 7 cycles per minute
- Life cycle of 12 years
- Standard sizes of up to
w=3,000 mm, h=3,000 mm





Clean rooms

Maximum air tightness and hygienic design.

Modern development and production processes in research and industry require special environmental conditions in which the concentration of air-borne particles may not exceed a certain level. Clean room doors from EFAFLEX are perfectly adapted to the requirements in controlled production zones.

They stand out due to their high air tightness in combination with a sophisticated door leaf guide, in order to prevent unwanted air exchange in the event of pressure differences. The smooth surface structure and the edgeless design of the high-speed doors facilitate cleaning and minimise particle deposits.



The special door for clean rooms.

EFA-SRT® CR Premium

With the EFA-SRT® CR Premium high-speed roll-up door, EFAFLEX has developed a door for the specific requirements of clean rooms (GMP). Even with high pressure on the door curtain, the air exchange is constantly reduced to a minimum, which increases the service life of air filters. The door model offers an outstanding, hygienic design with reduced surfaces to prevent particle deposits.

EFA-SRT® CR PREMIUM AT A GLANCE:

- Almost airtight
- TÜV-certified ANNEX I and GMP compliance
- ISO Class 5 according to DIN EN 14644-1
- Also suitable for air locks
- Opening speed up to 1.5 m/s
- Closing speed up to 0.5 m/s
- Up to 150,000 operating cycles p.a.
- Standard sizes up to w=2,500 mm, h=3,000 mm





EFA-SRT® CR EFFICIENT AT A GLANCE:

- Almost airtight
- Extremely slim frame
- Certified up to ISO Class 6
- Opening speed up to 1.0 m/s
- Closing speed up to 0.5 m/s
- Up to 100,000 operating cycles p.a.
- Standard sizes up to
w=3,000 mm, h=3,500 mm

The efficient clean room door.

EFA-SRT® CR Efficient

The EFA-SRT® CR Efficient high-speed roll-up door was specially designed for use in clean rooms with medium requirements. The particularly narrow door frames allow for a space-saving and visually appealing installation, even in confined spaces. Thanks to an integrated absolute encoder, the door can immediately return to automatic operation even after a power failure, without the need for a manual synchronisation run.





EFA-SRT® CR-C AT A GLANCE:

- Opening speed up to 2.5 m/s
- Designed for 200,000 load changes p.a.
- Standard sizes up to
w=3,500 mm, h=3,500 mm
- EFA-TRONIC® control fully integrated in
the construction (ISO Class 6)
- 2 mm Transilon curtain in various colours
with/without viewing window
- Stainless steel or powder coating
according to RAL
- TÜV Certification for clean room Class 6
or 7 according to ISO 14644-1
- Mechanical emergency release
possible on both sides

The space-saving door for clean rooms.

EFA-SRT® CR-C

With the EFA-SRT® CR-C, EFAFLEX has developed a door for the specific requirements of the clean room industry, where efficient sealing and installation dimensions are critical factors. The door is TÜV-certified for use in clean rooms of ISO Class 6 or 7. It is characterised by its compact design with minimal space requirement and slim frames, whilst the EFA-TRONIC® control is fully integrated into the construction (version ISO Class 6).

The turbo door for full visibility.

EFA-STT[®] CR

If speed is of the essence, the EFA-STT[®] CR transparent clean room door is the best solution. Thanks to its spiral, this high-speed door opens and closes reliably at a speed of up to 2.5 m/s. It is particularly useful when the exchange of pressure and atmosphere is to be minimised.

EFA-STT[®] CR AT A GLANCE:

- The door leaf consists at 70% of crystal clear acrylic glass
- Almost airtight
- Also for material locks
- Opening speed up to 3.0 m/s
- Closing speed up to 0.75 m/s
- Up to 200,000 operating cycles p.a.
- Standard sizes up to w=4,000 mm, h=5,000 mm







Burglary protection

Certified security without limitations.

Burglary and robbery are not uncommon and are usually planned beforehand and well organised by criminal networks. Alongside their own employees, machines, materials and stock are the most important assets for many companies. This makes reliable and secure burglary protection all the more important.

Certified security doors from EFAFLEX help to ensure maximum security for your business without having to sacrifice the speed of an efficient high-speed door. Your processes remain quick and efficient while your valuables receive the best protection.



The most secure high-speed door in the world.

EFA-SST® Secure

With the EFA-SST® Secure, you can provide maximum protection to the people around you without having to forego the speed of an efficient high-speed door. The door fits seamlessly into the structure of the building and impresses with top opening and closing speeds. Your processes remain quick and efficient while your valuables receive optimum protection. With our Secure doors you will find the perfect solution for virtually every security application.

EFA-SST® SECURE (RC 3) AT A GLANCE:

- Resistance Class RC 3 in accordance with DIN/TS 18194:2020 – RC 3
- Patented technology
- Tested and certified by ift Rosenheim
- Automatic locking during every closing procedure
- Emergency operation by tension springs
- Opening speed up to 1.0 m/s
- Closing speed up to 0.6 m/s
- Up to 250,000 operating cycles p.a.
- Max. sizes, w=4,000 mm, h=5,000 mm

EFA-SST® SECURE (RC 4) AT A GLANCE:

- Resistance Class RC 4 in accordance with DIN/TS 18194:2020 – RC 4
- Patented technology
- Tested and certified by ift Rosenheim
- Automatic locking during every closing procedure
- Emergency operation by tension springs
- Opening speed up to 1.0 m/s
- Closing speed up to 0.6 m/s
- Up to 250,000 operating cycles p.a.
- Max. sizes, w=4,000 mm, h=5,000 mm

The tailored safety solution.

EFA-SST® Efficient

Cramped installation situations require a tailored solution which fits in with the given conditions. With the high-speed spiral door EFA-SST® Efficient, EFAFLEX offers a compact and springless door which can also be positioned in locations with confined installation space. The scope of application for the EFA-SST® Efficient ranges from usage in indoor areas to usage as a secure hall closing door. With an on-site canopy, the high-speed door can also be installed outdoors.

EFA-SST® EFFICIENT AT A GLANCE:

- Slim frame for confined installation locations
- Chain drive ensures minimal maintenance costs
- Resistance Class RC 2 in accordance with DIN V ENV 1627-1630e cR-9.m20.2 (S8(i).2 (S8(i).27(
-





The image shows an industrial setting with explosion protection equipment. On the left, a white metal door is partially open, revealing a yellow triangular warning sign with the letters 'EX' in black. Above the door, a blue corrugated flexible duct is connected to a metal enclosure. In the foreground, a metal structure with several black cables hanging from it is visible. The background is dark and industrial.

Explosion protection

Reliable and effective door solutions.

In many companies, there are areas of production where potentially explosive substances are used, which can create a dangerous explosive atmosphere. Under no circumstances should sparks be allowed to form here. The areas are classified into so-called EX Zones depending on the probability of the occurrence of this atmosphere. These areas are: 0, 1, 2, 21 and 22.

The high-speed doors in the EFAFLEX EX Series are specially designed for use in potentially explosive atmospheres in accordance with ATEX Directive 2014/34/EU. In this respect, the mechanical explosion protection is aligned to the requirements of the corresponding EX Protection Zone. All the doors in the EX Series are suitable for use in EX Zones 1 and 2 and optionally, upon request, in EX Protection Zones 21 and 22. Therefore guaranteeing the highest levels of safety for employees, products and facilities.



**EFA-SST® EX
AT A GLANCE:**

- For use in explosion Protection Zones 1 and 2, optionally on request in EX Protection Zones 21 and 22
- Highest wind load capacity
- Suitable for external and internal applications
- Opening speed up to 1.0 m/s
- Closing speed up to 0.5 m/s
- Up to 200,000 operating cycles p.a.
- Standard sizes up to w=4,000 mm, h=5,000 mm

The hall door for potentially explosive atmospheres. **EFA-SST® EX**

The EFA-SST® EX is designed for both outdoor and indoor use in potentially explosive atmospheres. In addition to high opening and closing speeds, it particularly impresses with a solid door leaf with high wind resistance and optimal sealing. The door leaf consists of double-walled aluminium laths that be combined with transparent laths.

It is also possible to have the door leaf composed entirely of transparent laths. Due to the no-contact support of the laths in the spiral and the associated wear-free movement, their transparency is guaranteed for many years.

The interior door for explosive atmospheres.


EFA-SRT® EX

In addition to a standard frequency converter and a microprocessor control, the EFA-SRT® EX for indoor use includes all typical basic characteristics of state-of-the-art door technology. This includes dynamic door leaf tension and emergency operation via spring systems in the door frames. A hand lever on the door frames allows for quick emergency operation of the door system, e.g. in case of power failure. We use a black, non-transparent ATEX special curtain as the door leaf.

EFA-SRT® EX AT A GLANCE:

- For use in explosion protection zones 1 and 2, optionally on request in EX Protection Zones 21 and 22
- Heavy-duty inside door
- Opening speed up to 1.0 m/s
- Closing speed up to 0.5 m/s
- Up to 150,000 operating cycles p.a.
- Standard sizes up to
w=4,000 mm, h=4,000 mm



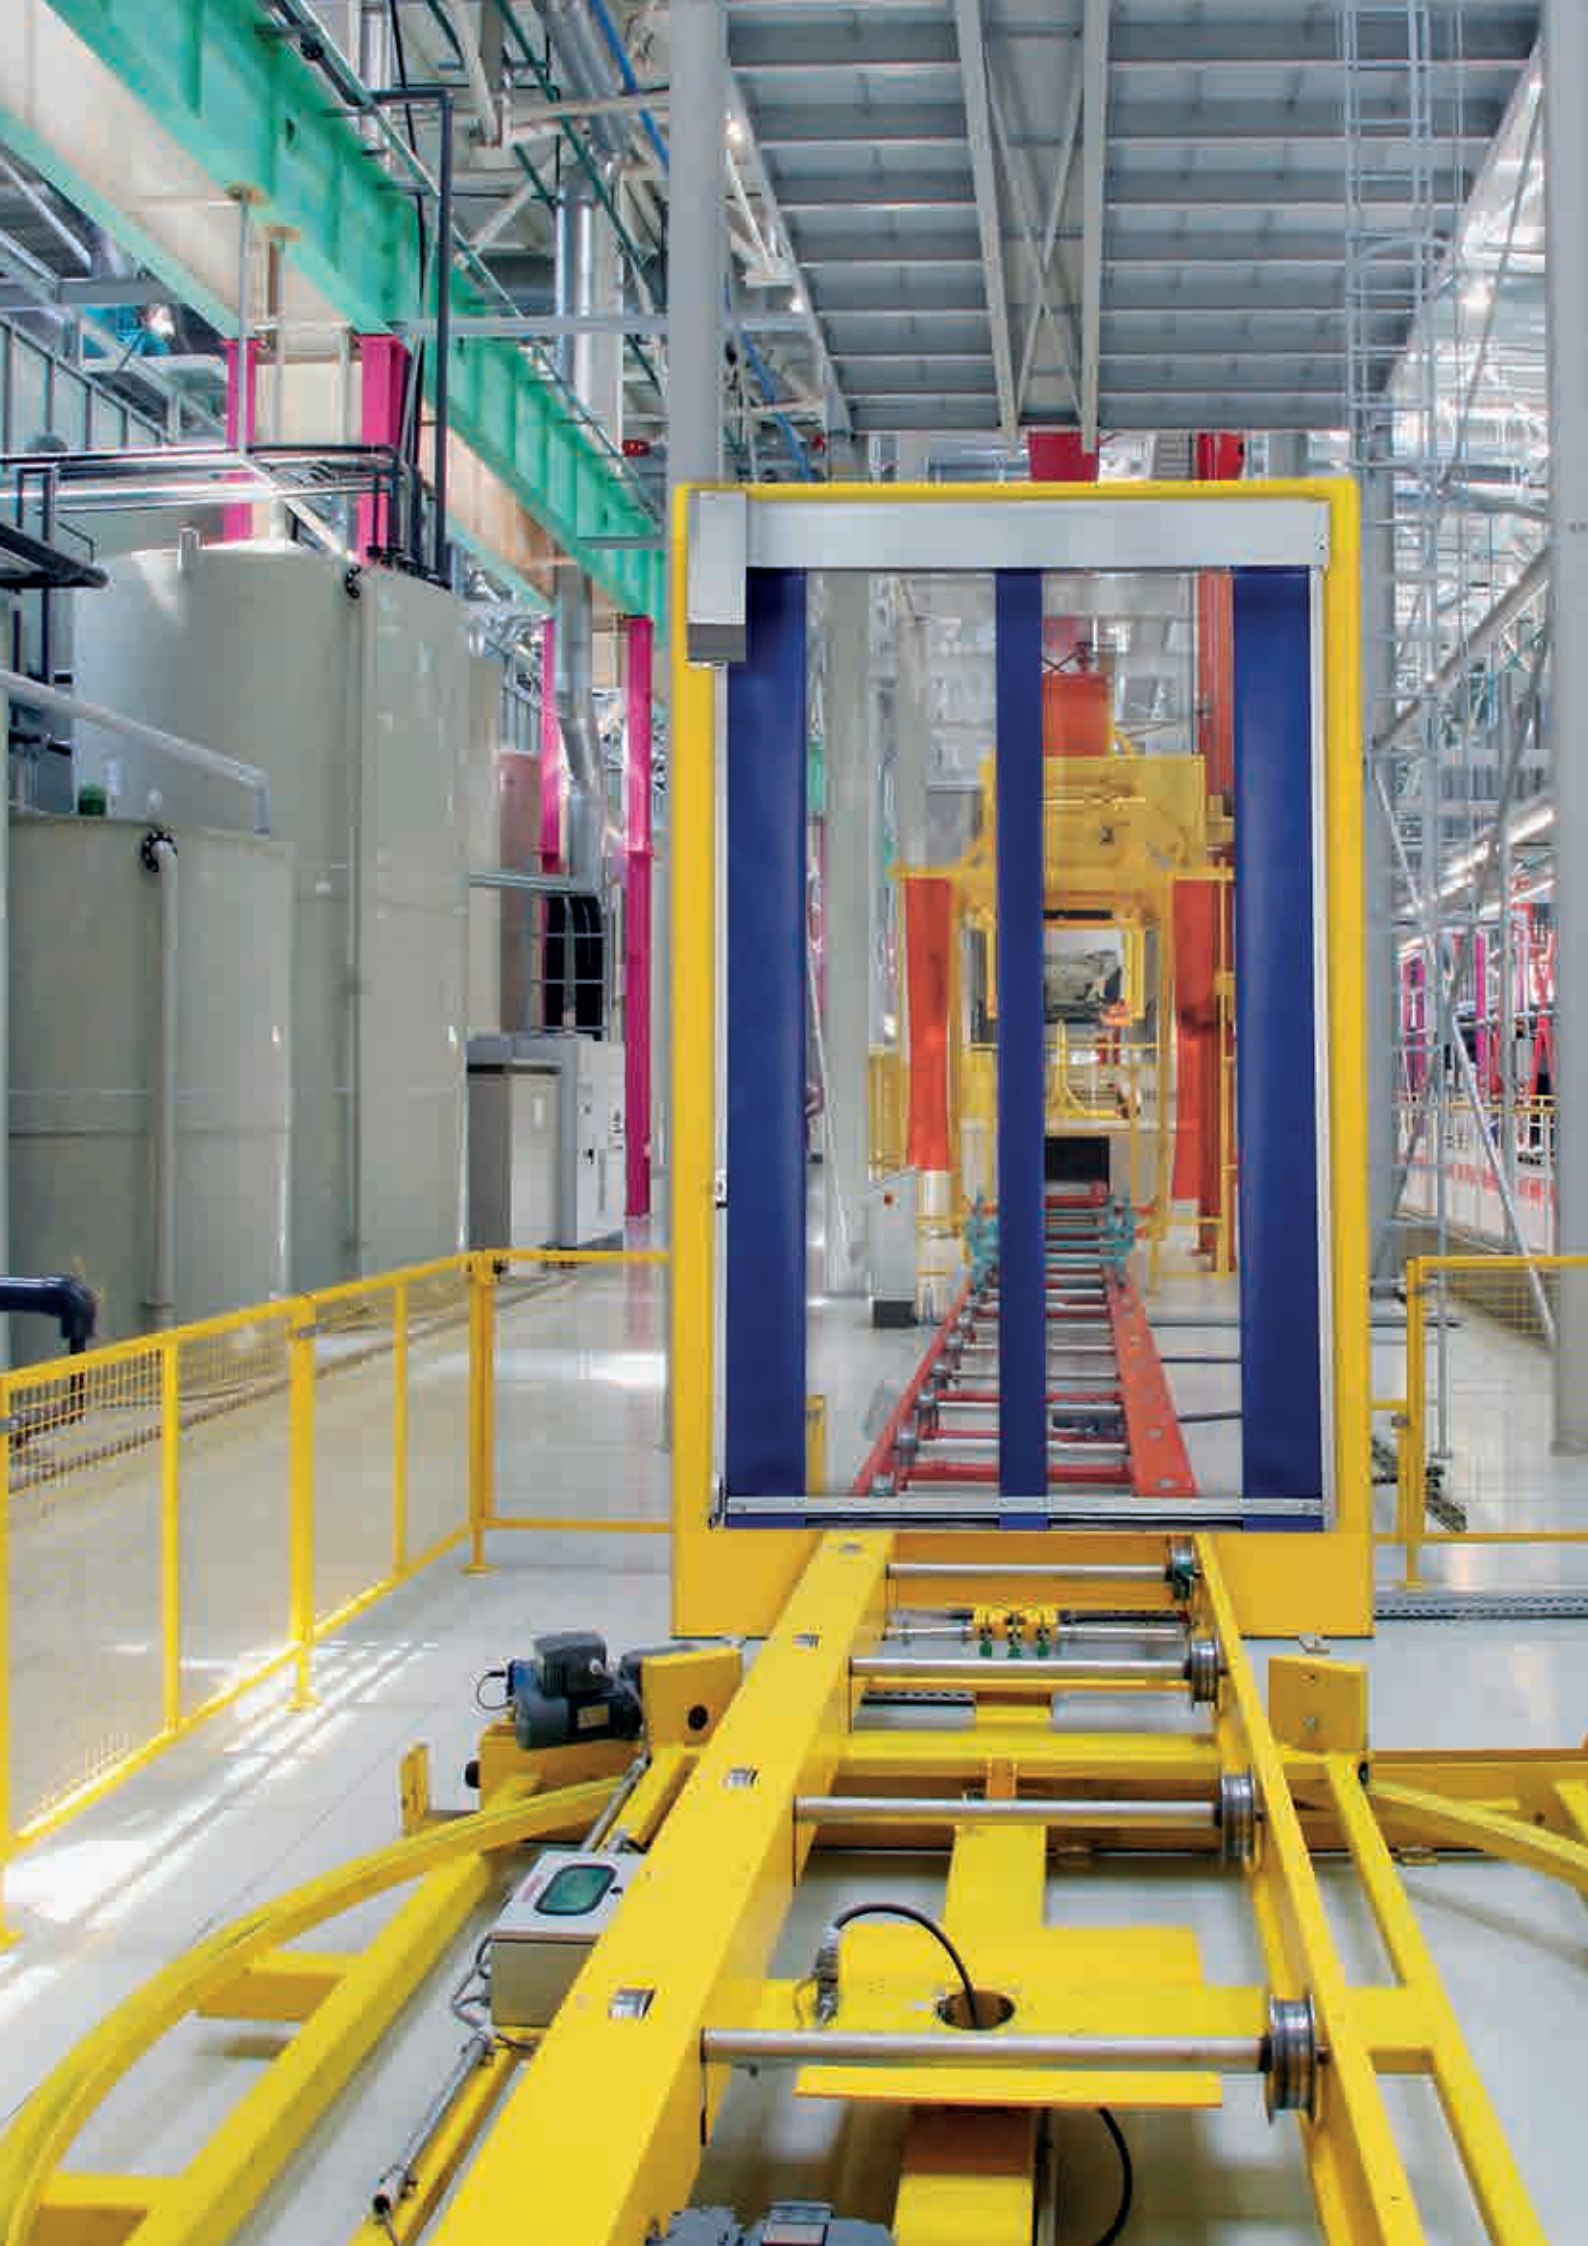


A photograph of a large industrial facility, likely a factory or warehouse, featuring multiple levels of metal walkways and railings. The scene is brightly lit, with yellow safety railings prominent in the foreground and middle ground. The background shows a complex network of pipes, ducts, and structural elements. The overall atmosphere is one of a modern, well-maintained industrial environment.

Intralogistics

Seamless flow of materials and maximum flexibility.

In intralogistics, effective and efficient interaction between control and software systems, conveying and storage technology as well as planning and process design is of central importance in order to ensure a seamless flow of materials. EFAFLEX high-speed doors are designed for all applications within intensive logistics processes and impress with their flexibility and versatility.

The modular structure of the individual components contributes to a professional flow of materials, perfect transportation and efficient logistics. Thanks to their space-saving and compact design, intralogistics doors can be perfectly integrated into the required safety guard and meet the highest safety standards.

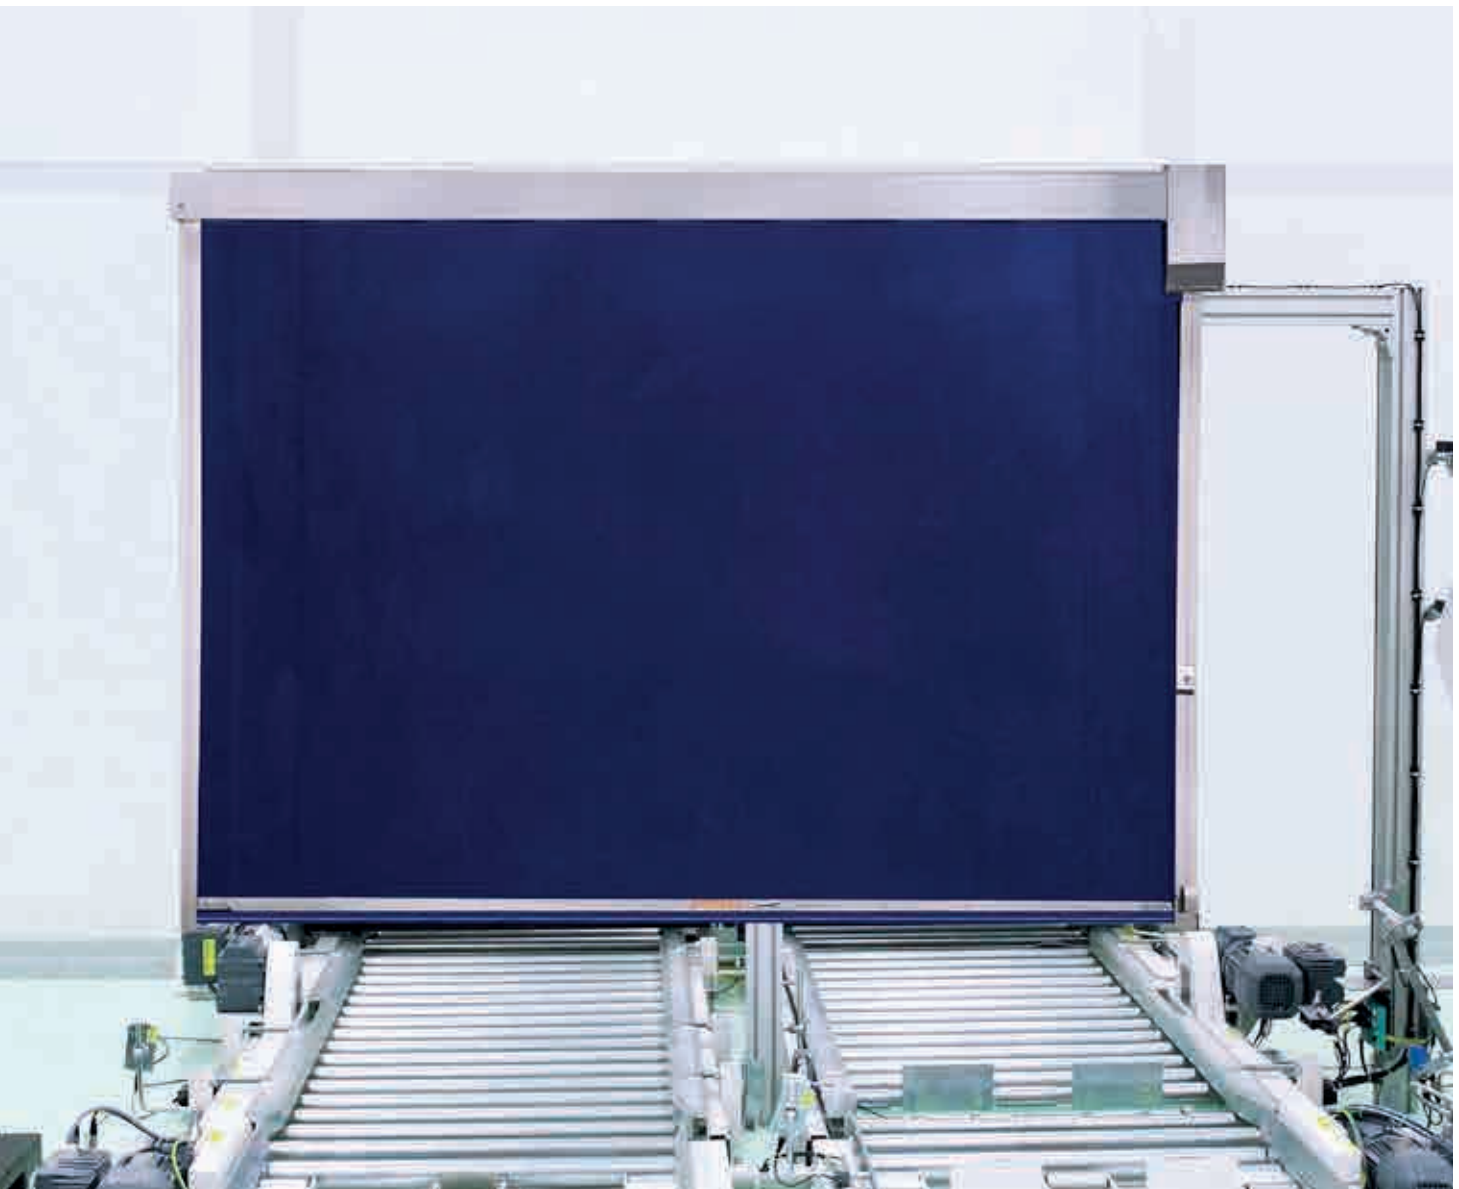

EFA-SRT® MTL
AT A GLANCE:

- Power-driven high-speed roll-up door for industrial and commercial use in the materials handling sector
- Particularly suitable for confined space applications
- Opening speed up to 1.5 m/s
- Closing speed up to 1.0 m/s
- Up to 250,000 cycles p.a.
- Sizes up to approx.
w=3,000 mm, h=3,000 mm

The high-speed roll-up door for logistics.

EFA-SRT® MTL

The EFA-SRT® MTL is designed for all applications within intensive logistics processes and is particularly suitable for commercial and industrial use in enclosed areas that are not exposed to wind or other weather conditions. With a multitude of application, equipment and combination options, the high-speed roll-up door (SRT) spans a wide range of conceivable applications in the eponymous spectrum of "Material – Transport – Logistics" (MTL).

The customised plant solution.

EFA-SRT® MHT Compact

Capable of up to 500,000 load changes per year, the innovative EFA-SRT® MHT Compact performs the highest number of openings and closings on the market. The door also impresses with its compact design with control integrated into the frames and a self-supporting construction. This allows it to be flexibly integrated and customised into complex systems, such as baggage handling at airports.

EFA-SRT® MHT COMPACT AT A GLANCE:

- Door system for industrial and commercial purposes in materials handling technology
- Control system completely integrated in construction
- Self-supporting frames due to floor fixation
- 3 cycles per minute
- Opening speed up to 1.5 m/s
- Up to 500,000 load changes p.a.
- Standard sizes up to
w=1,600 mm, h=1,600 mm







Periphery & accessories

Innovative equipment for best usability.

In addition to its broad spectrum of high-speed doors for a wide range of applications, EFAFLEX also offers a large selection of innovative accessories and an extensive range of peripheral products to help you to control your door systems. Almost all of our doors are equipped with an absolute encoder and frequency converter.

With EFA-SmartBuilding, EFAFLEX doors can be seamlessly integrated into higher-level building management systems. In addition, our IoT solution EFA-SmartConnect® ensures secure and intelligent networking and management of your industrial doors. The free app allows you to keep an eye on the current status of your doors in real time at all times.

In addition, unique safety systems such as door light grids, laser scanners and approach surveillance ensure the full protection of the area around your door system, thereby protecting people, doors, and vehi-


Intelligent networking of buildings and doors.

EFA-SmartBuilding

EFA-SmartBuilding enables the seamless integration of EFAFLEX gates via Modbus TCP/IP into a higher-level building management system. This allows EFAFLEX gates to be controlled and managed centrally and efficiently together with other smart building components. The door and control data is provided in real time in a structured and high-quality form. This enables detailed evaluation of connected sensors, proactive maintenance planning, and the implementation of complex automation scenarios.

EFA-SMARTBUILDING AT A GLANCE:

- Seamless integration into building management systems
- Rapid problem diagnosis
- Prevention of downtime and unnecessary costs
- Monitoring of cycles, inputs, opening status, and malfunctions
- Control of outputs
- Configuration of basic parameters
- Implementation of complex automation scenarios
- Easy activation via product key
- No internet connection required

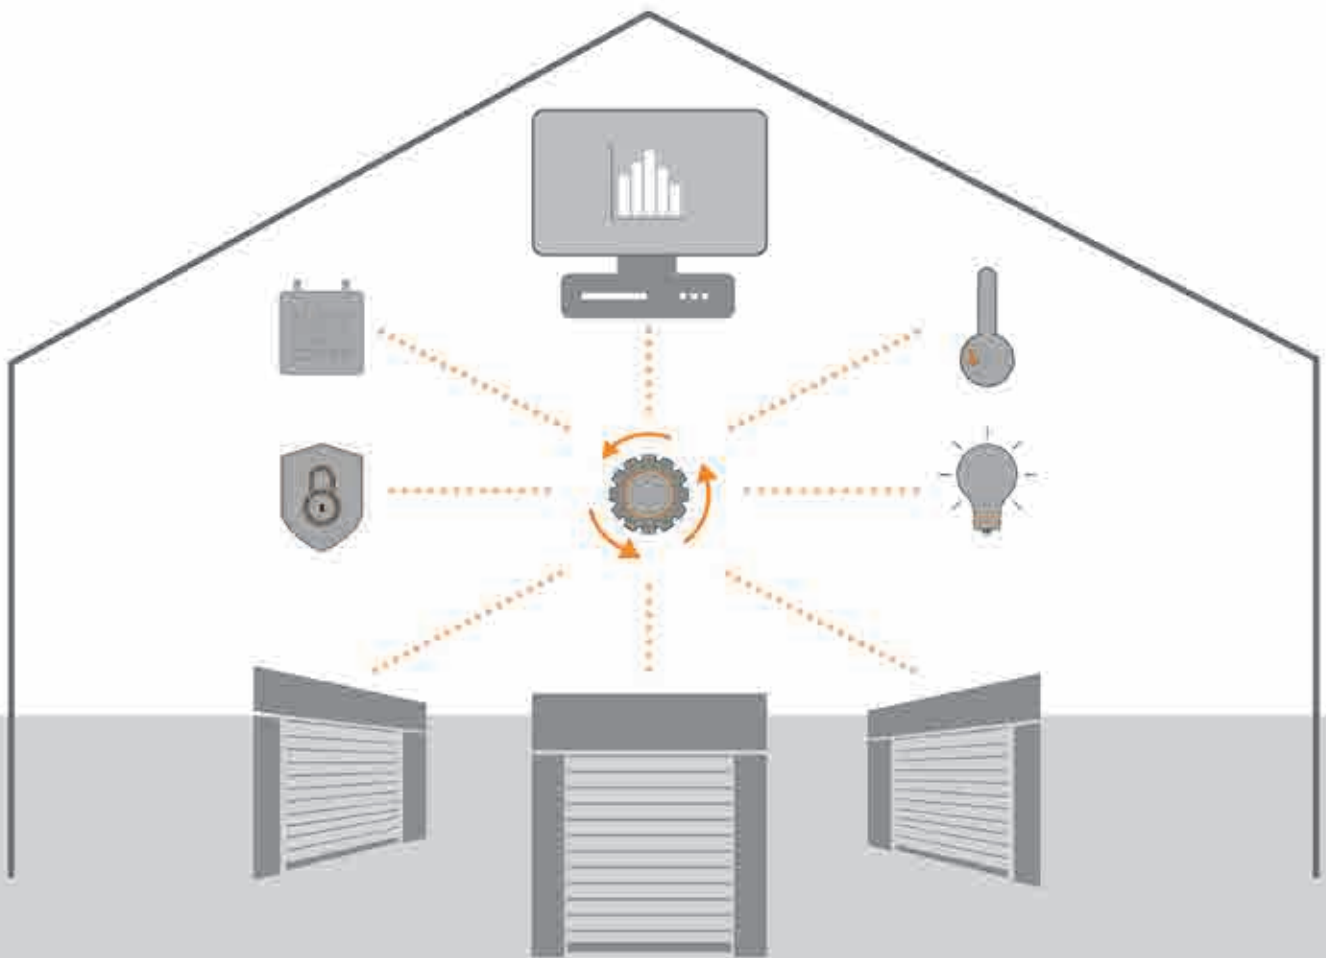



The intelligent networking of your doors.

EFA-SmartConnect®

With EFA-SmartConnect®, EFAFLEX offers the IoT solution for intelligent, networked doors. The free-of-charge user-friendly app facilitates central monitoring and displays the status of all doors clearly and in real time. According to the "Diagnosis – Service – Maintenance" principle, you can prevent faults in real time and plan the maintenance in advance. This not only minimises downtimes, but also reduces operating costs.

EFA-SMARTCONNECT® AT A GLANCE:

- All doors at a glance on your smartphone
- Straightforward, anticipatory planning of maintenance and repair work
- Rapid diagnosis of problems and digital service notifications sent directly to EFAFLEX
- Prevention of downtimes and unnecessary costs
- Possibility of using the existing Wi-Fi and LAN network
- Data sovereignty remains in the hands of the user
- No registration necessary
- Independent of mobile networks



The protector for doors and users. **EFA-3D-SCAN**

The EFA-3D-SCAN is an opening, presence, and safety sensor based on the principle of time-of-flight measurement. It covers a large area in front of the door by generating seven oblique laser curtains and combines a total of three functions in a single device: door opening, vestibule monitoring, and safety.

EFA-3D-SCAN AT A GLANCE:

- Precise distance measurement of objects
- Door safety through vehicle detection
- Energy savings through reliable detection of objects
- Independence from sources of interference such as rain, snow, fog, etc.
- Protection class I/IP 65
- Uncomplicated setup and configuration via app

Activator and safety system, all-in-one.

EFA-SCAN® laser scanner

The EFA-SCAN® laser scanner scans a three-dimensional security field based on laser beams in front of the door. With this, it detects vehicles and tracks their movement on a gapless basis with the use of intelligent direction detection. The door then opens as required.

Sophisticated software algorithms prevent the door from opening during rain, snow, fog, or extraneous light, which also makes the EFA-SCAN® suitable for outdoor installation. The innovative laser technology guarantees an incomparably secure and situation-dependent opening of your door.

EFA-SCAN® AT A GLANCE:

- Comprehensive approach surveillance
- Gapless capturing of vehicles
- Reliably ignores outside traffic
- High immunity to environmental influences (including fog)
- Performance level C according to EN 13849-1





The self-sufficient safety system. EFA-TLG® door light grid

Almost 90% of all collisions occur in the lower part of a door. Our TÜV-certified EFA-TLG® infrared light grid prevents collisions of this kind right from the start. For the purpose of protection, the completely self-monitoring system is installed directly into the lateral door guidance system. EFA-TLG® monitors the door closing level up to a height of 2.5 metres.


An almost flat light grid generates infrared rays which can detect even the smallest obstacles without contact. If the system detects an obstacle, the closing movement is immediately stopped and/or is not initiated in the first place. This unique technology therefore protects people, doors, vehicles, and materials.

EFA-TLG® AT A GLANCE:

- Close visual monitoring of the door closing level up to a height of 2,500 mm
- Risk-adapted responses to detected objects (people, vehicles, materials, etc.)
- TÜV-certified safety system
- All safety standards surpassed

EFAFLEX offers you a range of different systems to enable you to adapt the approach surveillance to the respective requirement. Our portfolio ranges from well-known solutions such as induction loops, safety sensors, active infrared sen-

sors, or radar motion detectors to the latest technological innovations that intelligently combine radar detectors and infrared technology in a single system, thus leveraging the benefits of both technologies.

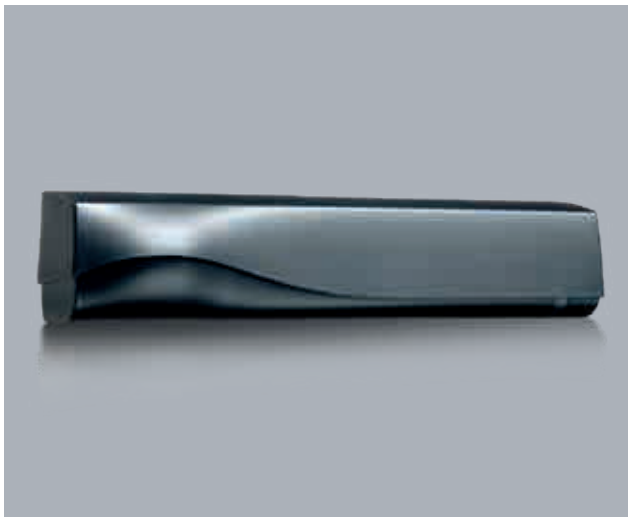


Contactless door activation for maximum hygiene.

Contactless opening systems.

In many industries, the way in which an industrial door can be opened is of key importance. In this respect, safety and ease-of-use come first. EFAFLEX offers you a range of con-

tactless opening systems which are ideal for hygiene-sensitive areas such as clean rooms, hospitals, the pharmaceutical industry, photovoltaics and battery production.

MAGIC SWITCH CHROMA

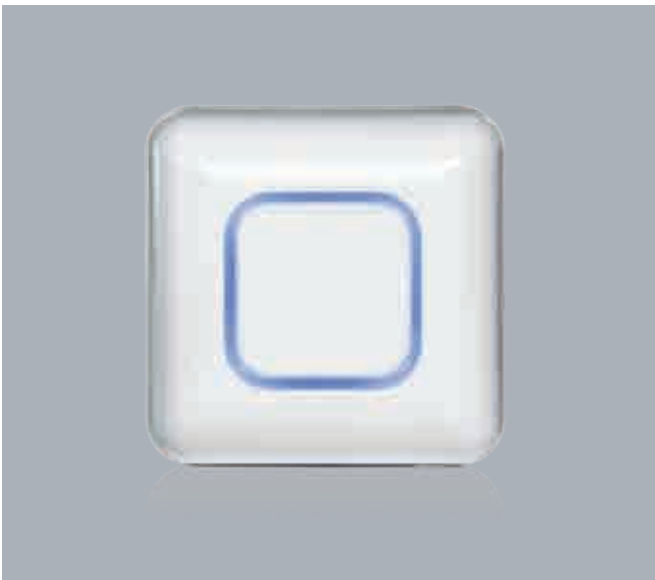

MAGIC SWITCH CHROMA AT A GLANCE:

- Contactless opening sensor that responds to hand movements
- Optimum suitability for hygiene-sensitive areas

MAGIC SWITCH INDUS



MAGIC SWITCH INDUS AT A GLANCE:

- Contactless opening sensor for industrial doors
- The optimal solution for industrial environments
- Hygienic and hard-wearing design
- High degree of protection against the penetration of dust and water

Intelligent and innovative door control.

EFA-TRONIC® door control

In addition to the topics of 'Connectivity' and 'Sensors and Safety,' EFAFLEX also offers solutions in the field of door controls. For this purpose, we have our proven EFA-TRONIC® control panel, as well as the additional versions EFA-TRONIC® Light and EFA-TRONIC® Professional with a robust steel casing available. These not only feature a modern design but also offer the highest functionality, durability, and full compatibility. Furthermore, our door controls are equipped with microprocessors of the latest generation.

Highest functionality, a compact form factor, and a modern design characterize the EFA-TRONIC® control panel, housed in a black polycarbonate casing. The basic equipment includes a main switch, a membrane keyboard, and a vacuum fluorescence display with function and diagnostic indicators. As standard, there are over 20 inputs, as well as safety functions and three bus systems available.



EFA-TRONIC® Light



EFA-TRONIC® Professional



EFA-TRONIC®

EFA-TRONIC® AT A GLANCE:

- Compact design
- Durable plastic casing
- Several versions possible (RAL colours, stainless steel, hygienic, UL, etc.)
- Protection class I/IP 65
- IoT module for the integration of EFA-SmartConnect®

The perfect solution for every industry.

As the global market leader in industrial high-speed doors, we offer our customers industry solutions which are tailored to them. Our customer base includes global players as well as small and medium-sized companies and public institutions. With more than 45 years of experience, we are experts and know the idiosyncrasies and specific requirements of each particular industry.






BEVERAGE INDUSTRY:

We offer solutions with minimal operational noise, excellent insulation and high opening and closing speeds.




PHARMACEUTICAL INDUSTRY:

Our special doors for clean rooms score with efficient sealing, low space requirements and hygienic cleanliness.



FOOD INDUSTRY:

EFAFLEX offers door solutions for deep-freeze, wet areas and temperature-controlled rooms that meet the highest hygiene requirements.




AUTOMOTIVE INDUSTRY:

Our individual door solutions for the automotive industry enable fast, smooth and trouble-free processes.



AIRPORT:

Our door solutions for the modern airport are fast, efficient, reliable and able to withstand high wind loads.



CAR PARKS:

Rely on maximum object protection, highest load capacity and high closing speeds with our door solutions.



SECURITY SECTOR:

With security solutions from EFAFLEX, you effectively protect yourself against theft and vandalism.



LOGISTICS:

Speed up your logistical processes and rely on the highest safety standards with our tailor-made doors.



A woman in a grey uniform is working on a large industrial door. The door has a tiger logo on it. The background is dark with a geometric pattern.

The EFAFLEX service philosophy

A team you can rely on.

The right partner – who stands by you throughout the planning process, finds solutions and answers to every challenge, relieves you of your workload and provides security, a partner who is at your service, 24/7: that partner is called EFAFLEX.

We offer you an all-round carefree package for your high-speed doors from all manufacturers – true to the EFAFLEX philosophy:

Reliable SERVICE FROM ONE SINGLE SOURCE.

Your all-round carefree package



EFAFLEX maintains a comprehensive, globally operating service network with its own subsidiaries and service partners, which can respond closely and quickly. To date, customers in more than 80 countries use our doors and our professional service. EFAFLEX has a wide range of services and programs that offer an economical solution for every need.

Whether it's spare parts or fault management, our repair and maintenance service or individual training: our after-sales portfolio covers every requirement surrounding your door system. International companies can therefore find an experienced and high-performance partner in EFAFLEX – a global premium service provider.

EXCELLENT SUPPORT



Our highly qualified service technicians are available to you at a large number of locations around the world. With our comprehensive service network, you usually have a direct contact person on site who can advise you competently on all matters. With our EFA SmartAssist[®], we also provide video support.

REPAIR & TROUBLESHOOTING



When it comes to repairs and damage, time is money. That is why we are there for you personally - around the clock. Our trained service staff and technicians guarantee professional and competent support for your door system – worldwide and throughout the entire product life of your system.

SPARE PARTS SERVICE



Spare parts must be on site within the shortest possible time and installed quickly and competently – we take care of that. Because EFAFLEX is your service partner for spare parts – for both our own door systems and for those of other manufacturers.

TRAININGS & GLOBAL SERVICE NETWORK




The high standards we set for our products and our service require highly trained employees. Through regular training of our global service network, we provide the proper know-how to meet all your concerns and needs.

MAINTENANCE & TESTING



EFAFLEX doors meet the highest demands in terms of performance, functionality and quality. To ensure that this remains reliable and permanent, regular maintenance and testing are required. Take advantage of our know-how to keep your system availability at a constantly high level and to be able to maintain your operating processes unhindered and safely.



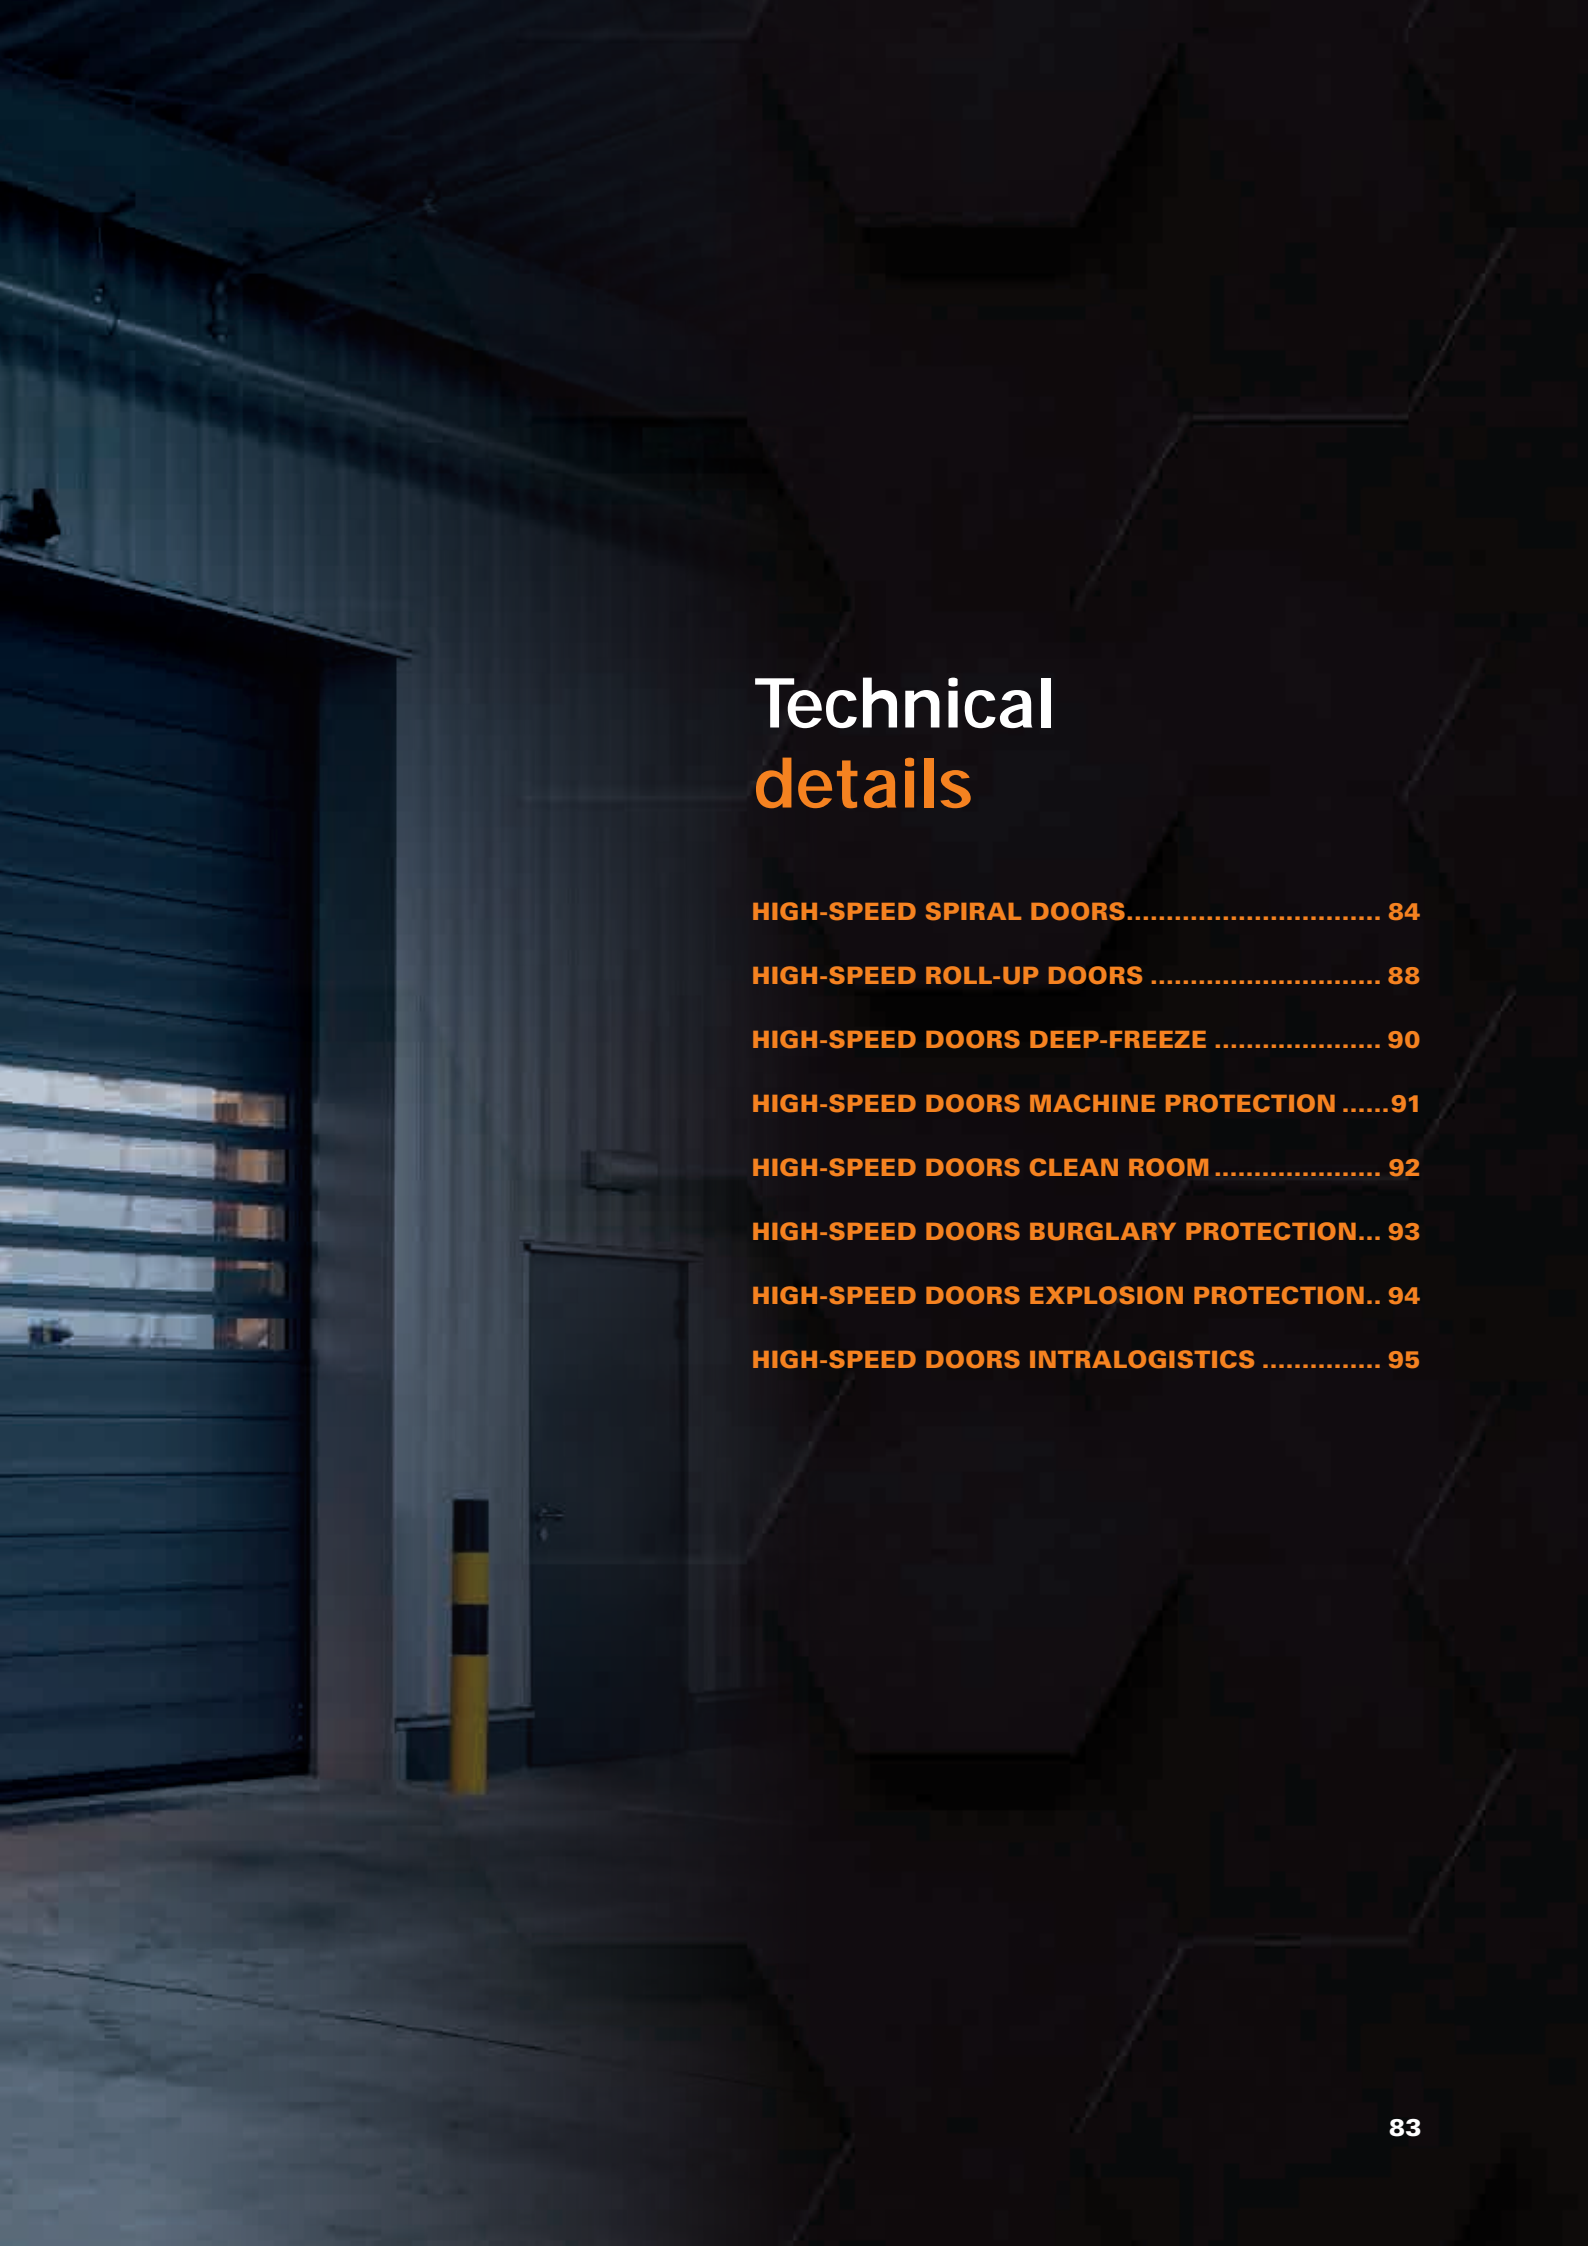

Technical details

HIGH-SPEED SPIRAL DOORS.....	84
HIGH-SPEED ROLL-UP DOORS	88
HIGH-SPEED DOORS DEEP-FREEZE	90
HIGH-SPEED DOORS MACHINE PROTECTION	91
HIGH-SPEED DOORS CLEAN ROOM	92
HIGH-SPEED DOORS BURGLARY PROTECTION...	93
HIGH-SPEED DOORS EXPLOSION PROTECTION..	94
HIGH-SPEED DOORS INTRALOGISTICS	95

Technical details

High-speed spiral doors

		Premium					ECO
		L	S	ÜS	XL	XXL	L
Application	Interior door	•	•	•	•	•	•
	Lock-up doors	•	•	•	•	•	•
Wind load max.*	According to DIN EN 12424 class	2 – 4	2 – 4	2 – 4	0 – 2	2 – 4	2 – 4
Operating forces / safe closing	According to DIN EN 13241 class	fulfilled	fulfilled	fulfilled	erfüllt	fulfilled	fulfilled
Resistance against water ingress*	According to DIN EN 13241 class	3	3	3	3	1	3
Air permeability*	According to DIN EN 13241 class	3	3	3	3	3	3
Direct airborne sound insulation R_{w}^*	in dB according to DIN EN 717-1	24	25	26	26	26	24
U value maximum*	in W/m ² K according to DIN EN 13241	1.52	0.91	0.66	0.66	0.54	1.52
Door size (in mm)	Width W max.	4,500	6,000	8,000	10,000	10,000	4,500
	Height H max.	5,000	6,000	8,000	6,600	12,000	5,000
Maximum door leaf speed*	in m/s	2.5	1.5	1.2	1.0	0.5	1.0
Guide of door leaf	Round Spiral	•	•	•	•	•	–
	Oval Spiral	•	•	–	–	–	–
	Low-header	–	–	–	–	–	•
Steel design	Galvanized sheet steel frame	•	•	•	•	•	•
	Stainless steel	o	o	–	–	–	o
	Powder coated in RAL colours	o	o	o	o	o	o
Door leaf	EFA-THERM® laths insulated/painted	•	•	•	•	•	•
	EFA-CLEAR® Vision laths double-walled, thermally separated	o	o	o	o	o	o
	EFA-CLEAR® Vision laths single-walled	o	o	–	–	–	o
	EFA-VENT® Ventilation laths	o	o	–	–	–	o
	EFA-ALUX® Aluminium laths	–	–	–	–	–	–
	Colour according to RAL (without vision panel)	o	o	o	o	o	o
Fire class	Building Material class DIN 4102	B2	B2	B2	B2	B2	B2
Weight balancing by		Spring	Spring	Spring	Spring	Spring	Spring
Designed for approx ... operating cycles per year		250,000	250,000	250,000	150,000	100,000	200,000
Drive	Electric motor	•	•	•	•	•	•
Control	EFA-TRONIC®	•	•	–	–	o	•
	EFA-TRONIC® Light	–	–	–	–	–	–
	EFA-TRONIC® Professional	o	o	•	•	•	o
	Main switch and foil keypad	•	•	•	•	•	•
Lead	Electricity connection 230 V/50 Hz	•	•	•	•	–	•
	Electricity connection 400 V/50 Hz	o	o	o	o	•	o
	Circuit breaker	16 A (K)	16 A (K)	16 A (K)	16 A (K)	16 A (K)	16 A (K)
Manual locking		•	•	•	•	•	o
Emergency operation	Automatic after manual activation	•	•	•	•	•	•
Safety Devices	EFA-TLG® door light grid in door closing line	•	•	•	•	•	o
	Contact edge	o	o	–	–	–	•
	Light barrier	o	o	–	–	–	•
	Approach area monitoring	o	o	o	o	o	o
	Light grid, external	o	o	o	o	o	o
Safety system including activator	EFA-SCAN® frame/bollard	o/o	o/o	o/o	o/o	o/o	o/o
	EFA-3D-SCAN	o	o	o	o	o	o

• Standard, o upon request, – Not available, npd = No Performance Determined

*Depending on door leaf, guide of door leaf and door size, we reserve the right to make technical alterations!

S Series

EFA-SST®

S	Basic		Essential		Classic			PS			
	L	L	L	L	S	ÜS	L-N	S-N	PS-L	PS-N	PS-S
•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•
2-4	2-4	2-4	2-4	2-4	4	2-4	2-4	4	4	4	2
fulfilled	fulfilled	fulfilled	fulfilled	fulfilled	fulfilled	fulfilled	fulfilled	fulfilled	fulfilled	fulfilled	fulfilled
3	3	2	0	0	0	npd	npd	2	-	-	2
3	3	0	2	2	2	npd	npd	1	-	-	1
25	24	20	23	25	25	23	25	23	23	23	23
0.91	1.52	1.67	5.8	5.6	5.6	5.8	5.7	6.5	6.6	6.5	
6,000	4,500	4,500	4,000	6,000	8,000	4,000	6,000	4,000	4,000	4,000	6,100
6,000	5,000	5,000	5,000	7,000	7,000	4,000	5,000	4,000	4,000	4,000	4,000
0.9	0.5	0.5	2.0	2.0	1.5	1.5	1.5	2.0	1.5	1.5	
•	-	•	-	•	•	-	-	•	-	-	•
•	-	-	•	•	•	-	-	-	-	-	-
•	•	-	-	-	-	•	•	-	•	•	-
•	•	•	•	•	•	•	•	•	•	•	•
o	o	-	o	o	o	o	o	o	o	o	o
o	o	o	o	o	o	o	o	o	o	o	o
•	•	•	-	-	-	-	-	-	-	-	-
o	o	o	-	-	-	-	-	-	-	-	-
o	o	o	o	o	o	o	o	o	o	o	o
o	o	o	o	o	o	o	o	o	o	o	o
-	-	-	•	•	•	o	o	•	o	o	•
o	o	o	o	o	o	o	o	o	-	o	o
B2	B2	B2	B2	B2	B2	B2	B2	B2	B2	B2	B2
Spring	Spring	Spring	Spring	Spring	Spring	Spring	Spring	Spring	Spring	Spring	Spring
200,000	100,000	100,000	250,000	250,000	250,000	150,000	150,000	200,000	200,000	200,000	
•	•	•	•	•	•	•	•	•	•	•	
•	o	o	•	•	-	•	•	•	•	•	
-	•	•	-	-	-	-	-	-	-	-	
o	o	o	o	o	•	o	o	o	o	o	
•	•	o	•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•	•	•	•	•	
o	-	-	o	o	o	o	o	o	o	o	
16 A(K)	16 A(K)	16 A(K)	16 A(K)	16 A(K)	16 A(K)	16 A(K)	16 A(K)	16 A(K)	16 A(K)	16 A(K)	
o	o	o	o	o	o	o	o	o	o	o	
•	•	•	•	•	•	•	•	•	•	•	
*	-	-	o	*	*	o	*	o	o	o	
*	•	•	•	*	*	•	*	•	•	•	
*	•	•	•	*	*	•	*	•	•	•	
o	o	o	o	o	o	o	o	o	o	o	
o	o	-	o	o	o	o	o	o	o	o	
o/o	-	-	-/o	-/o	-/o	o	o	-/o	o	o/o	
o	o	o	o	o	o	o	o	o	o	o	

Technical details

High-speed spiral doors

		S Series			
		EFA-STT®			
Size		L	S	ÜS	L-N
Application	Interior door	●	●	●	●
	Lock-up doors	●	●	●	●
Wind load max.*	According to DIN EN 12424 class	3 – 4	2 – 4	2 – 4	3 – 4
Operating forces / safe closing	According to DIN EN 13241 class	fulfilled	fulfilled	fulfilled	fulfilled
Resistance against water ingress*	According to DIN EN 13241 class	0	0	0	0
Air permeability*	According to DIN EN 13241 class	2	2	2	0
Direct airborne sound insulation R _w *	in dB according to DIN EN 717-1	20	20	20	20
U value maximum*	in W/m ² K according to DIN EN 13241	6.5	6.37	6.28	6.5
Door size (in mm)	Width W max.	4,000	6,000	8,000	4,000
	Height H max.	5,000	6,000	7,800	5,000
Maximum door leaf speed*	in m/s	3.0	2.8	2.0	1.8
Guide of door leaf	Round Spiral	●	●	●	–
	Low-header	–	–	–	●
Steel design	Galvanized sheet steel frame	●	●	●	●
	Stainless steel	○	○	–	○
	Powder coated in RAL colours	○	○	○	○
Door leaf	EFA-CLEAR® Vision laths single-walled	●	●	●	●
	EFA-VENT® Ventilation laths	○	○	○	○
	EFA-ALUX® Aluminium laths	–	–	–	○
	Vision panel single-walled / double-walled	●/–	●/–	●/–	●/–
	Non transparent infill single-walled / doublewalled	○/–	○/–	○/–	○/–
	Colour according to RAL (without vision panel)	○	○	○	○
Fire class	Building Material class DIN 4102	B2	B2	B2	B2
Weight balancing by		Spring	Spring	Spring	Spring
Designed for approx ... operating cycles per year		200,000	200,000	200,000	120,000
Drive	Electric motor	●	●	●	●
Control	EFA-TRONIC®	●	●	–	●
	EFA-TRONIC® Professional	○	○	●	○
	Main switch and foil keypad	●	●	●	●
Lead	Electricity connection 230 V/50 Hz	●	●	●	●
	Circuit breaker	16 A(K)	16 A(K)	16 A(K)	16 A(K)
Manual locking		○	○	○	○
Emergency operation	Automatic after manual activation	●	●	●	●
Safety Devices	EFA-TLG® door light grid in door closing line	○	*	*	○
	Contact edge	●	*	*	●
	Light barrier	●	*	*	●
	Approach area monitoring	○	○	○	○
	Light grid, external	○	○	○	○
Safety system including activator	EFA-SCAN® frame/bollard	○/○	○/○	○/○	○/○
	EFA-3D-SCAN	○	○	○	○

● Standard, ○ upon request, – Not available,

*Depending on door leaf, guide of door leaf and door size, we reserve the right to make technical alterations!

		S Series			
		EFA-STR®			
	Size	L	S	S-N	L-N
Application	Interior door	●	●	●	●
	Lock-up doors	○	○	○	○
Wind load max.*	According to DIN EN 12424 class	2 – 3	2 – 3	2 – 3	2 – 3
Operating forces / safe closing	According to DIN EN 13241 class	fulfilled	fulfilled	fulfilled	fulfilled
Resistance against water ingress*	According to DIN EN 13241 class	0	0	npd	npd
Air permeability*	According to DIN EN 13241 class	1	1	npd	npd
Direct airborne sound insulation R _w *	in dB according to DIN EN 717-1	12	12	12	12
U value maximum*	in W/m²K according to DIN EN 13241	6.1	5.95	6.0	6.1
Door size (in mm)	Width W max.	4,000	7,000	7,000	4,000
	Height H max.	5,000	6,000	5,000	5,000
Maximum door leaf speed*	in m/s	4.0	3.2	3.2	3.2
Guide of door leaf	Round Spiral	●	●	–	–
	Low-header	–	–	●	●
Steel design	Galvanized sheet steel frame	●	●	●	●
	Stainless steel	○	○	○	○
	Powder coated in RAL colours	○	○	○	○
Door leaf	flexible fabric in different colours with/ without vision panel	○/●	○/●	○/●	○/●
Fire class	Building Material class DIN 4102	B2	B2	B2	B2
Weight balancing by		Spring	Spring	Spring	Spring
Designed for approx ... operating cycles per year		200,000	200,000	120,000	120,000
Drive	Electric motor	●	●	●	●
Control	EFA-TRONIC®	●	●	●	●
	EFA-TRONIC® Light	–	–	–	–
	EFA-TRONIC® Professional	○	○	○	○
	Main switch and foil keypad	●	●	●	●
Lead	Electricity connection 230 V/50 Hz	●	●	●	●
	Electricity connection 400 V/50 Hz	○	○	○	○
	Circuit breaker	16 A(K)	16 A(K)	16 A(K)	16 A(K)
Emergency operation	Automatic after manual activation	●	●	●	●
Safety Devices	EFA-TLG® door light grid in door closing line	○	○(*)	○(*)	○
	Contact edge	●	●	●	●
	Light barrier	●	●	●	●
	Approach area monitoring	○	○	○	○
	Light grid, external	○	○	○	○
Safety system including activator	EFA-SCAN® frame/bollard	○/○	○/○	○/○	○/○
	EFA-3D-SCAN	○	○	○	○

● Standard, ○ upon request, – Not available, npd = No Performance Determined, ○ (*) Standard for W > 5,000 mm,
* Depending on door leaf, guide of door leaf and door size, we reserve the right to make technical alterations!

Technical details

High-speed roll-up doors

		Premium	ECO	
Size		L	L	S
Application	Interior door	●	●	●
Wind load max.*	According to DIN EN 12424 class resp. in km/h	0 – 3 –	– 18	0 – 2 18
Operating forces / safe closing	According to DIN EN 13241 class	fulfilled	fulfilled	fulfilled
Resistance against water ingress*	According to DIN EN 13241 class	npd	npd	0
Air permeability*	According to DIN EN 13241 class	npd	npd	1
Direct airborne sound insulation R_w *	in dB according to DIN EN 717-1	12	11	11
Door size (in mm)	Width W max.	5,000	4,000	6,000
	Height H max.	5,500	4,000	7,000
Maximum door leaf speed*	in m/s	2.6	2.0	2.0
Average speed, approx.*	Opening in m/s	2.0	1.5	1.5
	Closing in m/s	0.75	0.75	0.6
	Closing by door light grid EFA-TLG® in m/s	1.0	1.0	1.0
Steel design	Galvanized sheet steel frame	●	●	●
	Stainless steel	○	○	○
	Powder coated in RAL colours	○	○	○
Door leaf	Door curtain made of flexible PVC, transparent with warning stripes in different colours	●	●	–
	flexible fabric in different colours with / without vision pane	○/○	○/○	○/●
Fire class	Building Material class DIN 4102	B2	B2	B2
Weight balancing by		Spring	Weight	Weight
Designed for approx ... operating cycles per year		150,000	150,000	150,000
Collision protection	EFA-EAS®	○	○	–
Drive	Electric motor	●	●	●
Control	EFA-TRONIC®	●	●	●
	EFA-TRONIC® Light	–	○	–
	EFA-TRONIC® Professional	○	○	○
	Main switch and foil keypad	●	●	●
Lead	Electricity connection 230 V/50 Hz	●	●	●
	Electricity connection 400 V/50 Hz	○	○	○
	Circuit breaker	16 A (K)	16 A (K)	16 A (K)
Emergency operation	Automatic after manual activation	●	●	●
	Manual activation	–	–	–
Safety Devices	EFA-TLG® door light grid in door closing line	○	○	○
	Contact edge	●	●	●
	Light barrier	●	●	●
	Approach area monitoring	○	○	○
	Light grid, external	○	○	○
Safety system including activator	EFA-SCAN® frame/bollard	–/○	–/○	–/○
	EFA-3D-SCAN	○	○	○

● Standard, ○ upon request, – Not available, npd = No Performance Determined,

* Depending on door leaf, guide of door leaf and door size, we reserve the right to make technical alterations!

R Series

Value	EFA-SRT®			
	ST	EC	FR	EasyFit
L	L	L		
●	●	●	●	●
0 – 1	–	–	0 – 3	npd
80	18	18	–	41
fulfilled	fulfilled	fulfilled	fulfilled	fulfilled
npd	npd	npd	0	npd
npd	npd	npd	0	npd
11	12	12	12	11
3,000	4,000	4,000	4,000	4,000
3,500	4,000	4,000	5,000	4,000
1.7	2.0	2.0	2.6	1.5
1.3	1.5	1.5	1.6	1.5
0.5	0.75	0.75	0.75	–
0.8	–	–	1.0	1.0
●	●	–	●	●
○	○	●	○	○
○	○	–	○	○
○	○	○	●	○
○/●	○/●	○/●	○/○	○/●
B2	B2	B2	B2	B2
Spring	Spring	Weight	Spring	–
150,000	150,000	150,000	150,000	150,000
–	●	–	–	–
●	●	●	●	●
○	○	–	–	–
●	●	–	–	○
○	○	●	●	●
●	●	●	●	●
○	○	○	○	–
16 A(K)	16 A(K)	16 A(K)	16 A(K)	16 A(K)
●	●	●	●	–
–	–	–	–	●
○	–	–	○	●
●	–	●	●	–
● prel. L	●	●	●	–
○	○	○	○	○
○	○	–	○	○
–/–	–/–	–/–	–/○	–/○
○	○	–	○	○

Technical details

High-speed doors deep-freeze

		S Series				
		Premium		EFA-SST®		Inertisation
Size		ISO-L-60	ISO-60	Installation on warm side	Installation on cold side	
Application	Interior door	●	●	Lock-up-deep-freeze	Lock-up-deep-freeze	●
	Lock-up doors	●	●	–	–	●
Wind load max.*	According to DIN EN 12424 class	3 – 4	2 – 4	3	3	3
Operating forces / safe closing	According to DIN EN 13241 class	fulfilled	fulfilled	fulfilled	fulfilled	fulfilled
Resistance against water ingress*	According to DIN EN 13241 class	3	3	npd	npd	npd
Air permeability*	According to DIN EN 13241 class	3	3	5	5	5
Direct airborne sound insulation R _w *	in dB according to DIN EN 717-1	25	25	26	26	26
U value maximum*	in W/m²K according to DIN EN 13241	0.93	0.80	0.62	0.62	0.62
Door size (in mm)	Width W max.	4,500	6,000	4,000	4,000	4,500
	Height H max.	4,550	6,000	6,000	6,000	6,000
Maximum door leaf speed*	in m/s	2.5	1.5	2.0	2.0	2.0
Guide of door leaf	Round Spiral	●	●	●	●	●
Steel design	Galvanized sheet steel frame	●	●	●	●	●
	Stainless steel	○	○	○	○	○
	Powder coated in RAL colours	○	○	○	○	○
Door leaf	EFA-THERM® laths insulated / painted	●	●	●	●	●
	EFA-CLEAR® Vision laths double-walled, thermally separated	○	○	–	–	○
	EFA-ALUX® Aluminium laths	–	–	–	–	–
	Colour according to RAL (without vision panel)	○	○	○	○	○
Fire class	Building Material class DIN 4102	B2	B2	B2	B2	B2
Weight balancing by		Spring	Spring	Spring	Spring	Spring
Designed for approx ... operating cycles per year		250,000	250,000	200,000	200,000	200,000
Drive	Electric motor	●	●	●	●	●
Control	EFA-TRONIC®	●	●	–	–	●
	EFA-TRONIC® Light	–	–	–	–	–
	EFA-TRONIC® Professional	○	○	●	●	○
	Main switch and foil keypad	●	●	●	●	●
Lead	Electricity connection 230 V/50 Hz	●	●	–	–	●
	Electricity connection 400 V/50 Hz	○	○	●	●	○
	Circuit breaker	16 A (K)	16 A (K)	25 A (K)	25 A (K)	16 A (K)
Manual locking		●	●	○	○	○
Emergency operation	Automatic after manual activation	●	●	●	●	●
Safety Devices	EFA-TLG® door light grid in door closing line	●	●	●	–	●
	Contact edge	○	○	●	●	○
	Light barrier	○	○	○	●	○
	Approach area monitoring	○	○	○	–	○
	Light grid, external	○	○	○	–	○
Safety system including activator	EFA-SCAN® frame/bollard	○/○	○/○	–	–	–
	EFA-3D-SCAN	○	○	–	–	–

● Standard, ○ upon request, – Not available, npd = No Performance Determined,

* Depending on door leaf, guide of door leaf and door size, we reserve the right to make technical alterations!

Technical details

High-speed doors machine protection

		MS Series							
		EFA-SRT® MS						EFA-SST® MS	
		Performance				A		USD	
Size		L	S	L	S	L	S		
Application	According to DIN EN 12424 class	●	●	●	●	●	●	●	●
Wind load max.*	According to DIN EN 13241 class	0	0	0	0	0	0	–	4
Operating forces/ safe closing	According to DIN EN 13241 class	fulfilled	fulfilled	fulfilled	fulfilled	fulfilled	fulfilled	fulfilled	fulfilled
Air permeability*	in dB according to DIN EN 717-1	0	0	0	0	0	0	–	0
Direct airborne sound insulation R _w *	in dB nach DIN EN 717-1	12	12	12	12	12	12	12	23
Door size (in mm)	Width W max.	3,500	6,200	3,000	5,000	3,000	6,000	6,000	3,000
	Height H max.	3,500	5,500	3,000	3,500	3,000	3,500	4,500	3,000
Maximum door leaf speed*	in m/s	2.0	2.0	1.8	1.8	1.8	1.8	1.8	2.7
Guide of door leaf	Round Spiral	–	–	–	–	–	–	–	●
Design	Galvanized sheet steel frame	○	○	●	●	●	●	●	●
	Powder coated in RAL colours	○	○	○	○	○	○	○	○
	Door frames aluminium anodised	●	●	–	–	–	–	–	–
Door leaf	EFA-CLEAR® Vision laths single-walled	–	–	–	–	–	–	–	○
	EFA-VENT® Ventilation laths	–	–	–	–	–	–	–	○
	EFA-ALUX® Aluminium laths	–	–	–	–	–	–	–	●
	Colour according to RAL (without vision panel)	–	–	–	–	–	–	–	○
	Door curtain made of flexible PVC, transparent with warning stripes in different colours	●	●	●	●	●	●	●	–
	flexible fabric in different colours with / without vision panel	○/○	○/○	○/○	○/○	○/○	○/○	○/○	–
Fire class	Building Material class DIN 4102	B2/B1 ○	B2/B1 ○	B2/B1 ○	B2/B1 ○	B2/B1 ○	B2/B1 ○	B2/B1 ○	B2
	Building Material class SE DIN EN ISO 340	○	○	○	○	○	○	○	–
Weight balancing by		–	–	–	–	–	–	Weight	Spring
Designed for approx ... operating cycles per year		1,000,000	1,000,000	250,000	250,000	250,000	250,000	250,000	250,000
Drive	Electric motor	●	●	●	●	●	●	●	●
Control	EFA-TRONIC® Professional MS	●	●	●	●	●	●	●	●
	EFA-TRONIC®	○	○	○	○	○	○	○	○
	EFA-ProfiNetSafe®	○	○	○	○	○	○	○	○
Lead	Electricity connection 230 V/50 Hz	○	○	○	○	○	○	○	○
	Electricity connection 400 V/50 Hz	●	●	●	●	●	●	●	●
	Circuit breaker	16 A(K)	16 A(K)	16 A(K)	16 A(K)	16 A(K)	16 A(K)	16 A(K)	16 A(K)
Emergency operation	Automatic after manual activation	–	–	–	–	–	–	–	○
	Manual activation	●	●	●	●	●	●	–	–
Safety Devices	EFA-TLG® door light grid in door closing line	●	●	–	–	–	–	–	–
	Contact edge	○	○	●	●	●	●	●	●
	Light barrier	○	○	●	●	●	●	–	●
	Light grid, external	○ HSO	○ HSO	○ HSO	○ HSO	○ HSO	○ HSO	○	○ HSO

● Standard, ○ upon request, – Not available, HSO = Head Safe Option,

* Depending on door leaf, guide of door leaf and door size, we reserve the right to make technical alterations!

Technical details

High-speed doors clean room

		CR Series			
		EFA-SRT® CR			EFA-STT® CR
		Premium	Efficient	C	
Application	Interior door	●	●	●	●
Operating forces / safe closing	According to DIN EN 13241 class	fulfilled	fulfilled	fulfilled	fulfilled
Clean room class	ISO 14644-1	5	6	6/7	6
Door size (in mm)	Width W max.	2,500	3,000	3,500	4,000
	Height H max.	3,000	3,500	3,500	5,000
Maximum door leaf speed*	in m/s	1,5	1,0	2,5	3,0
Guide of door leaf	Round Spiral	–	–	–	●
Steel design	Galvanized sheet steel frame	–	–	–	●
	Stainless steel	●	○	●	○
	Powder coated in RAL colours	○	●	○	○
Door leaf	EFA-CLEAR® Vision laths single-walled	–	–	–	●
	non transparent infill single-walled / doublewalled	–	–	–	○
	Colour according to RAL (without vision panel)	–	–	–	○
	flexible fabric in different colours with / without vision panel	○/●	○/●	○/●	–
Fire class	Building Material class DIN 4102	B2	B2	B2	B2
Weight balancing by		Spring	–	Spring	Spring
Designed for approx ... operating cycles per year		200,000	100,000	200,000	200,000
Drive	Electric motor	●	●	●	●
Control	EFA-TRONIC®	● integrated	●	●	●
	EFA-TRONIC® Professional	–	–	–	○
	Main switch and foil keypad	●	●	●	●
Lead	Electricity connection 230 V/50 Hz	●	●	●	●
	Circuit breaker	16 A (K)	16 A (K)	16 A (K)	16 A (K)
Manual locking		–	–	–	○
Emergency operation	Automatic after manual activation	●	–	●	○
	Manual activation	–	●	–	–
Safety Devices	EFA-TLG® door light grid in door closing line	○	–	●	○
	Contact edge	●	●	–	●
	Light barrier	●	●	–	●
	Approach area monitoring	○	○	○	○
	Light grid, external	○	○	○	○
Safety system including activator	EFA-SCAN® frame/bollard	–/○	–/○	–/○	–/○
	EFA-3D-SCAN	○	○	○	○

● Standard, ○ upon request, – Not available, * Depending on door leaf, guide of door leaf and door size, we reserve the right to make technical alterations!

Technical details

High-speed doors burglary protection

		EFAPROTECT Series	
		EFA-SST®	
		Secure (RC3+RC4)	Efficient
Size		L	L
Application	Interior door	●	●
	Lock-up doors	●	●
Wind load max.*	According to DIN EN 12424 class	4	2 – 4
Operating forces / safe closing	According to DIN EN 13241 class	fulfilled	fulfilled
Resistance against water ingress*	According to DIN EN 13241 class	–	2
Air permeability*	According to DIN EN 13241 class	–	0
Direct airborne sound insulation R _w *	in dB according to DIN EN 717-1	25	20
U value maximum*	in W/m²K according to DIN EN 13241	5.8	1.7
Door size (in mm)	Width W max.	4,000	4,000
	Height H max.	5,000	5,130
Guide of door leaf	Round Spiral	●	●
Steel design	Galvanized sheet steel frame	●	●
	Powder coated in RAL colours	○	○
Door leaf	EFA-THERM® laths insulated/painted	–	●
	EFA-THERM® laths with double-walled viewing windows	–	○
	EFA-CLEAR® Vision laths single-walled	–	○
	EFA-VENT® Ventilation laths	–	○
	EFA-ALUX® Aluminium laths	●	–
Fire class	Building Material class DIN 4102	B2	B2
Weight balancing by		Spring	Spring
Designed for approx ... operating cycles per year		250,000	150,000
Drive	Electric motor	●	●
Control	EFA-TRONIC®	–	●
	EFA-TRONIC® Professional	●	○
	Main switch and foil keypad	●	●
Lead	Electricity connection 230 V/50 Hz	●	–
	Electricity connection 400 V/50 Hz	○	●
	Circuit breaker	16 A(K)	16 A(K)
Emergency operation	Automatic after manual activation	●	–
	Manual activation	–	●
Safety Devices	EFA-TLG® door light grid in door closing line	●	–
	Contact edge	–	●
	Light barrier	–	●
	Approach area monitoring	○	○
	Light grid, external	○	○
Safety system including activator	EFA-SCAN® frame/bollard	–/○	○/○
	EFA-3D-SCAN	○	○

● Standard, ○ upon request, – Not available, * Depending on door leaf, guide of door leaf and door size, we reserve the right to make technical alterations!

Technical details

High-speed doors intralogistics

		MTL Series	
		EFA-SRT® MTL	EFA-SRT® MHT Compact
Application	Interior door	●	●
Wind load max.*	According to DIN EN 12424 class	0	–
Operating forces / safe closing	According to DIN EN 13241 class	fulfilled	–
Air permeability*	According to DIN EN 13241 class	0	–
Direct airborne sound insulation R _w *	in dB according to DIN EN 717-1	12	12
Door size (in mm)	Width W max.	3,000	1,600
	Height H max.	3,000	1,600
Guide of door leaf	Round Spiral	–	–
Steel design	Galvanized sheet steel frame	●	●
	Powder coated in RAL colours	○	○
Door leaf	EFA-CLEAR® Vision laths single-walled	–	–
	EFA-VENT® Ventilation laths	–	–
	EFA-ALUX® Aluminium laths	–	–
	Colour according to RAL (without vision panel)	–	–
	Door curtain made of flexible PVC, transparent with warning stripes in different colours	●	–
	flexible fabric in different colours with/without vision panel	○/○	–/●
Fire class	Building Material class DIN 4102	B2	B2
Weight balancing by		–	–
Designed for approx ... operating cycles per year		250,000	500,000
Drive	Electric motor	●	●
Control	EFA-TRONIC®	○	–
	EFA-TRONIC® Light	●	●
	EFA-TRONIC® Professional	–	–
	Main switch and foil keypad	–/●	–
Lead	Electricity connection 230 V/50 Hz	●	●
	Electricity connection 400 V/50 Hz	○	–
	Circuit breaker	16 A (K)	16 A (K)
Emergency operation	Automatic after manual activation	–	–
	Manual activation	○(*)	–
Safety Devices	EFA-TLG® door light grid in door closing line	○	–
	Contact edge	●	–
	Light barrier	●	–
	Approach area monitoring	○	–
	Light grid, external	○	○
Safety system including activator	EFA-SCAN® frame/bollard	–/○	–/○
	EFA-3D-SCAN	○	○

● Standard, ○ upon request, – Not available, ○(*) Depending on the type of drive,

* Depending on door leaf, guide of door leaf and door size, we reserve the right to make technical alterations!

EFAFLEX

Tor- und Sicherheitssysteme

GmbH & Co. KG

Fliederstraße 14

84079 Bruckberg / Germany

Telephone +49 8765 82-0

www.efaflex.com

info@efaflex.com

EFAFLEX® is a registered and legally
protected trademark.

Subject to technical changes. Some
diagrams depict special features.

Overall design:

www.creativconcept.de | 2026

EFAFLEX 
safe high-speed doors