


## DATA SHEET

### V 2012 – Supermarket Flexible high-speed doors for special applications

The standardised full equipment with operator and shaft cover, light grille and automatic emergency opening via a counter weight (in case of power failure) make this flexible plastic curtain door a safe choice for indoor areas with high customer traffic. Safety features such as a main switch are part of the scope of delivery of this high-speed door.

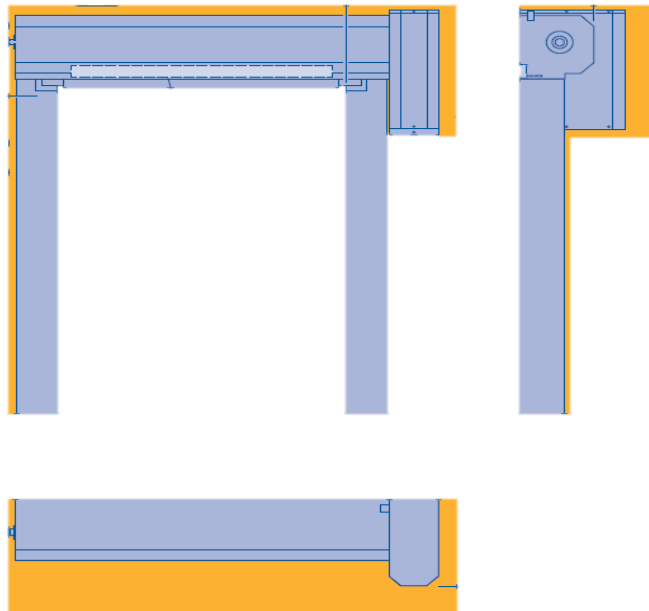

#### Gate size

Max. width	2500	mm
Max. height	2500	mm

#### Speed (FU control, 1-phase, BK 150 FUE-1)

Max. opening speed	1,2	(m/s)
Max. closing speed	0,8	(m/s)

Product description	
Use	Internal door
Curtain material	PVC
Fabric thickness (mm)	1,5
Vision panel thickness (mm)	2,0
Design	Self-supporting
Guide material / surface	Galvanized steel
	Optionally galvanized steel, coated (RAL to choose), polished stainless steel V2A
Shaft / operator cover	straight
Potential-free contacts	3
Temperature range	+5°C to +40°C

Equipment features		
Wind lock	Curtain slide	•
Bottom profile	SoftEdge (rubber bottom profile)	•
Curtain colour	RAL 1018 Zinc yellow	•
	RAL 2004 Pure orange	•
	RAL 3002 Carmine red	•
	RAL 5010 Gentian blue	•
	RAL 7038 Agate grey	•

• Standard    ○ Optional

Safety and operator equipment		
Emergency opening	Emergency crank handle	•
	Counter weights and operating current brake	•
Security features	EN 13241.1	•
Operator and control	Frequency converter	•
	Connecting voltage, 1-phase, 1 – 230 V, N, PE	•
	Open-Stop-Close button	•
	Main switch with all-pole switch-off, 1-phase	•
	Emergency-off button, 1-phase	•
	Electronic limit switch DES	•
Protection category for operator / control	IP 54 / IP 65	•
Fuse, 1-phase, 3-phase	16 A, slow-acting	•
Hold-open phase, in sec.	1 – 200	•

• Standard    ○ Optional

The information above, in particular the specifications and illustrations, are not binding and do not constitute an agreement on quality or a guarantee. Changes and errors are expressly reserved. The data sheet is subject to copyright. No part may be reproduced without our prior permission.